

## Air-A-Lator®



The Air-A-Lator® and the “Mason’s Choice” are the number one outside air intake regulators for masonry fireplaces. The fire will burn warmer, cleaner and more safe because regulated outside air is used for combustion. The homeowner can control both the volume of air and direction of air with these unique products.

### Key Features

Arrows Indicate Air Flow

Fire burns warmer, cleaner, and safer because regulated outside air is used for combustion. Air follows built-in passage under your fireplace

“Mason’s (on side wall) Choice”

For optimum efficiency Air-A-Lator® should be installed in the front row of brick in center of fireplace with opening facing fire or grate.

Exclusive Dual Damper System gives you complete control of combustion air. Other outside air intakes just let you control the volume of air. The Air-A-Lator® Dual Damper System gives you control not only of volume of air, but it also lets you control the direction of air. Both are necessary to produce the proper flames and control the rate of burning.

Helps stop backdraft smoking caused by negative pressure in the home.

Provides safety from dangerous carbon monoxide fumes. The use of an Air-A-Lator® in your fireplace helps prevent great amounts of air from being drawn out of your home. This reduces or eliminates the chance of drawing carbon monoxide fumes from household heating appliances — a growing problem as homes become more air-tight.

Less heat loss for more energy savings. Instead of drawing heated air from inside your home, Air-A-Lator® takes outside air and directs it right where it’s needed.

Reduces pollution, ashes and customer complaints. When your fire burns more completely you’ll have much less ash and smoke both in the air and in your home.

More heat per pound of fuel. Creosote, smoke, ash and unburned wood are all products of incomplete combustion. Because Air-A-Lator® provides the air needed for complete combustion, you can save dollars on fuel costs.

Meets building requirements. Many states now require a source of outside air. In many cases Air-A-Lator® is the only outside air intake regulator that meets these requirements.

#### Legend

- C** Copper Coating Available
- B** Black Powder Coating Available
- 4** Packaged Quantity Per Carton
- 6** Packaged Cartons Per Pallet

## Air-A-Lator® for New Construction



Type	Dimensions	Order #
NH	13.5" x 4.5" x 2.75"	200414
1B	9" x 4.5" x 2.75"	210409

**Note: Type "NH" & "1B" for New Construction; Type "1B" is the size of one brick and has the same advanced qualities as type "NH"**

18 gauge galvanized powder coated – black; 10 per case

## Slip In Air-A-Lator® for New Construction or Retrofit



Type	Dimensions	Order #
NH	13.5" x 4.5" x 2.75"	220414
1B	9" x 4.5" x 2.75"	220409

**Note: Type "NH" & "1B" for New Construction or Retrofit; Type "1B" is the size of one brick and has the same advanced qualities as type "NH"**

18 gauge galvanized powder coated – black; 10 per case

## The "Mason's Choice" 3-Piece Kits



	Rigid	Flex
Inner Dimensions	Order #	Order #
3"	230370	230380
4"	230470	230480

**Note: Rigid Kit includes: 12" Tube, Hood, Door**  
**Flex Kit includes 3' SS Flex, Hood, Door**

## The "Mason's Choice" Stainless Steel Side Wall Outside Air Kit



	Kit	Hood Only	Door Only
Inner Dimensions	Order #	Order #	Order #
3"	230330	230394	230391
4"	230430	230494	230491

**Note: Telescopes 14" to 28"; Elbow adjusts 90° to 180°; 26 gauge stainless steel (type 304); Wall vent hood includes screen.**

## Aluminum Closable Louver and Optional Round Adapter



Dimensions	Order #
8" x 8" Louver	260808
6" Round Adapter	270806


**Note: Specify if you want adapter riveted to louver. Includes Screen.**

## Aluminum Brick Louver – Fixed



Dimensions (WxH)	Order #
2.25" x 8"	260802

**Note: Includes Screen**

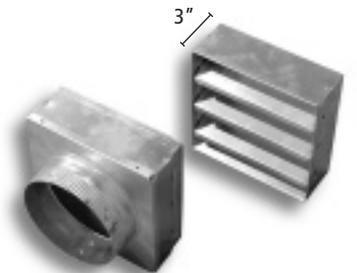

**Air-A-Lator®**