




BERNARD DALSIN MANUFACTURING

MSRP | DEALER DIRECT PRICE LIST & CATALOG

2026/2027

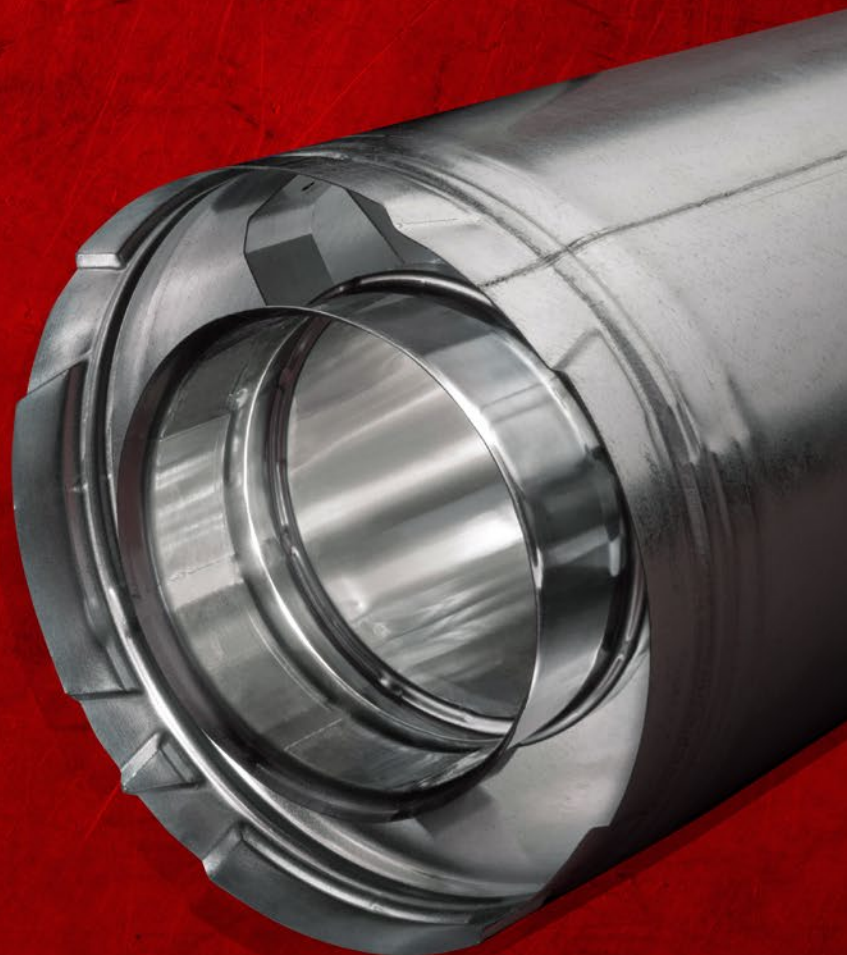

BDM Online
Catalog



PROUDLY MADE IN THE U.S.A.



BERNARD DALSIN MANUFACTURING

Proud Manufacturer of:



Pro-Form[®]
Direct Vent System



BIOVENT[®]



DALSIN LINE[®]



CHIM-A-LATOR

Visit Our Website at:

www.dalsinmfg.com

View product information and pricing, download installation instructions and forms, keep up-to-date on product announcements, warranty registration and sign up to receive our latest catalog on our website at www.dalsinmfg.com.





About BDM

A FAMILY OWNED AND OPERATED COMPANY

Bernard Dalsin Manufacturing Company has been manufacturing venting and chimney accessories since 1944. The company's niche in the marketplace is the consistent manufacture of top quality products. Quality is the driving force behind every endeavor the company has taken on and is the basis from which the company has been built.

For over 75 years we have designed and manufactured many product lines for the venting and fireplace industry. Some of these products include:

- **Bio Vent®** Wood Pellet Venting
- **"Dalsin Line"®** Chimney Liners & Fittings
- **CHIM-A-LATOR®** Deluxe Top Sealing Dampers
- **CHIM-A-LATOR®** Chimney Caps and Stackable Caps
- **AIR-A-LATOR®** Fresh air intake devices
- **Insul-Flue®** Wall pass through systems
- **PRO-FORM®** Direct Vent System
- **Mason's Choice®**
- Appliance venting kits and components
- Proprietary venting components for partner manufacturers

Our Methods of Distribution

- Hearth and Chimney Distributors
- HVAC Distributors
- MSRPs
- Building Supply Companies
- OEM

Our Channels of Distribution

- Specialty Retailers
- HVAC MSRPs
- Chimney Sweeps
- Brick Yards / Building Contractors
- Fireplace / Furnace Manufacturers

Mission Statement

At Bernard Dalsin Manufacturing Company, quality is our distinguishing attribute, our mark of excellence and our promise to you. We pledge performance reliability, economy, timely delivery and true value on any product or part we manufacture. As part of this pledge, we strive to meet the standards you set for a quality supplier. That's our mission and our promise to you.



PROUDLY MADE IN THE U.S.A.



1944

—

1969

—

1970's

—

1990's

—



2000

—



2020

BDM (AKA Chim-A-Lator Company) is Founded

Bernard and Mary Jane Dalsin started the company as a roofing company with manufacturing as a side business in Bloomington, MN.




Bernard and Mary Jane incorporated the Chim-A-Lator Company and it became a separate entity with manufacturing being it's main focus.



Bernard Dalsin named his son William Dalsin president of the Chim-A-Lator Company.

William and Lynn Dalsin purchased the Chim-A-Lator company. This is when the name was changed to Bernard Dalsin Manufacturing (BDM). William remained owner until he passed away in 2019.



BDM moved their facility from Bloomington, MN to it's current facility in Farmington, MN.

Brought BDM to it's 3rd generation of family ownership. William and Lynn Dalsin sons Christopher and Timothy Dalsin purchased the company. They are committed to continuing the family tradition for generations to come.

BDM'S PREFERRED CUSTOMER PROGRAM

FIND ADDITIONAL
PROGRAM DETAILS HERE



At BDM, it is our belief that our customers' success is the cornerstone of our own success. In the hearth business everyone knows that products and services are becoming ever competitive and that the best way to stay ahead in a competitive environment is to offer "value added" benefits to the end user. When you become a preferred customer at BDM that "value added" philosophy is a little easier to accomplish. That is because we strive to offer true value to you, our customer, which in turn will allow you to bring added benefits to your customer. You see, we look at each individual customer and attempt to build a relationship with them. One that is mutually beneficial to both BDM and the customer.

Standard Dealer Price is 57.5% off MSRP

64%

Discount off MSRP

62.5%

Discount off MSRP

60%

Discount off MSRP

57.5%

Discount off MSRP

Double Platinum

\$15,000 (net) ordered the previous calendar year, or at such time that you reach \$15,000 (net) in sales during the current year.

Platinum

\$10,000 (net) ordered the previous calendar year, or at such time that you reach \$10,000 (net) in sales during the current year.

Gold

\$5,000 (net) ordered the previous calendar year, or at such time that you reach \$5,000 (net) in sales during the current year.

Dealer

Note: Contact Customer Service for discount details. 1-800-729-9505 or sales@dalsinmfg.com.

Doing Business with BDM

How To Order

Call our toll free number 1-800-729-9505 answered 24 hours a day or fax your order to 651-460-6080. Local phone calls please use 651-460-1080. E-mail orders can be sent to sales@dalsinmfg.com.

Online Ordering

You may now order online at www.dalsinmfg.com. Simply setup a username and password.

Office Hours

Our office hours are from 7:30 a.m. to 4:00 p.m. Central Standard Time. An answering machine is on-line for 24-hour service.

Drop Shipments

There is a \$10.00 charge for all drop shipments under \$200.00.

Satisfaction Guaranteed

If you or your customer are not completely satisfied for any reason, return the merchandise within 30 days and receive a full refund of the purchase price. Certain conditions apply. Please call for details.

Freight Terms

Orders that cannot ship via UPS will ship from our warehouse using the most cost effective carrier. Unless your order qualifies for free freight. Orders over \$3,000.00 net qualify for free freight to the lower 48 states. Orders under \$3,000.00 net will be prepaid and add the actual freight cost at the time of shipment.

For your protection, we recommend that you inspect all items before accepting delivery. If you discover a shortage or damage — please do not refuse the shipment. Note the shortage or damage on the freight bill and notify BDM within 10 business days of receiving the shipment. We will assist you with filing a freight claim. Without the discrepancy or damage documentation in writing a freight claim may be denied.

Again, any discrepancies MUST be reported within 10 business days of receiving your shipment and noted on the delivery ticket.

Price Changes

Although we make every effort to keep our price list current, we reserve the right to change prices or specifications at any time without notice. Surcharge may be applied without notice.

Terms

All orders placed without prior credit approval must be either prepaid, Visa/MasterCard/Discover/American Express, or C.O.D. (C.O.D. fees vary by carrier). BDM will charge \$30.00 for each check returned unpaid. All credit card payments due past 10 days of the invoice date will be charged a 3% processing fee.

Returned Products

There is a 15 percent restocking charge for all returned goods. The original invoice must accompany the product. Custom made, special order, OEM, or obsolete items cannot be returned for credit. All material must be in saleable condition and return freight paid by the customer. No returns will be accepted older than 6 months.

BDM'S FREE FREIGHT PROGRAM

All BDM products ship free on orders \$3,000.00 and above to anywhere in the lower 48 states, shipped to one location. Any order under \$3,000.00 shipped to the lower 48 states will be prepaid and add the actual freight cost at the time of shipment.

Any accesorial charges incurred are not covered under free freight program: lift gate, residential charge, etc.



Legal Notices

Bernard Dalsin Manufacturing Company (hereafter "BDM") continuously improves its products and services. We reserve the right to modify product specifications at any time. BDM shall not be held liable for any loss incurred due to any errors in the print production of this catalog or typographical errors. Always check with your BDM representative for the most current product specifications and dimensions before beginning any project.

Some BDM products carry a limited warranty against manufacturing defects and normal service failure. Contact your BDM representative for current, detailed warranty information, as the warranty may be contingent on proper installation and usage. Current installation instructions are also available from your BDM representative. BDM shall not be held liable for any damages incurred during or after an improper installation or use of any of its products.

All information in this catalog including, but not limited to, text, images, logos, and technical information, is copyrighted ©2025 by BDM. It may not be reproduced, altered, publicly displayed, or sold in any way without prior written consent of BDM.

Any failure of BDM to strictly enforce any one condition of our terms shall not be construed as a precedent for future violations.

Bernard Dalsin Manufacturing, BDM, The CHIM-A-LATOR Company, CHIM-A-LATOR, AIR-A-LATOR, Insul-Flue, The Dalsin Line, Mason's Choice, Pro-Form and Bio Vent are trademarks and registered trademarks of Bernard Dalsin Manufacturing Co.

The "UL" logo is a registered trademark of Underwriters Laboratories, Inc and used with permission. The "O-TL" logo is a registered mark of OMNI-Test Laboratories, Inc. and used with permission. All other trademarks are property of their respective owners.

Visit Our Website at:
www.dalsinmfg.com

View product information and pricing, download installation instructions and forms, keep up-to-date on product announcements, warranty registration and sign up to receive our latest catalog on our website at www.dalsinmfg.com.

Table of Contents

01

Gas

Pro-Form® Direct Vent System	3
Aluminum Flex Venting	14

02

Pellet

Bio Vent®	25
-----------	----

Proud Manufacturer of:

Pro-Form
Direct Vent System

BIOVENT

DALSIN LINE

CHIM-A-LATOR

03

Wood Burning

Light SS Flexible Liner	35
24 Ga SS Rigid Liner & Fittings	47
26 Ga SS Black Single-Wall Stove Pipe	55
Air-A-Lator®	59
Insul-Flue®	61

04

Chimney Caps

Chim-A-Lator®	65
Chimney Caps	68

Catalog Legend System:

Our catalog gives you packaging information on each product. The number and symbol combination tells you carton quantities, pallet quantities, and if the part is available in powder coated black or copper.

C	Copper Coating Available		Packaged Quantity Per Carton
B	Black Powder Coating Available		Packaged Cartons Per Pallet



01 Gas




Direct Vent

3

Aluminum Flex Venting

14

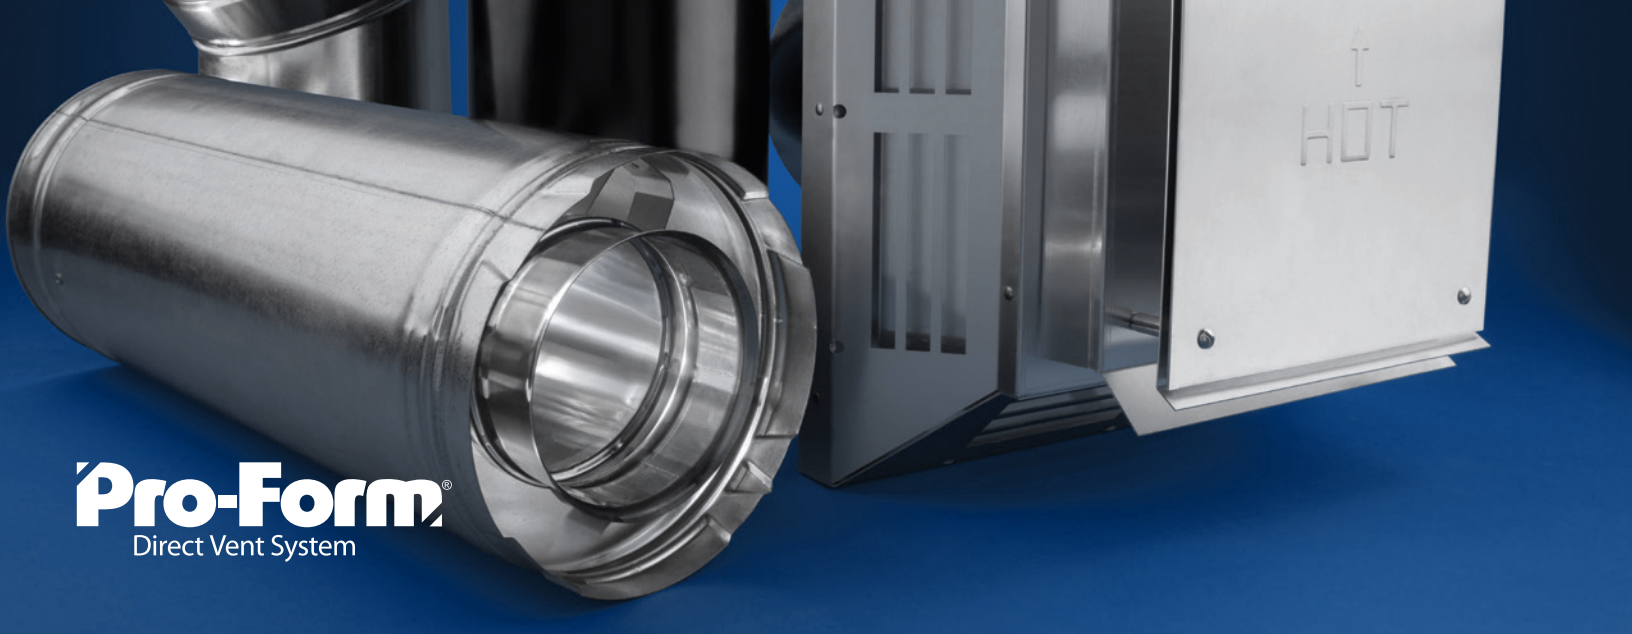

Pro-Form®
Direct Vent System




Pro-Form® Direct Vent System

The Pro-Form direct vent system has best in industry features that provide ease of installation, extreme durability and superior performance. The Pro-Form direct vent system is fully tested and listed to ANSI Z21.88-2009 / CSA 2.33 (2009)

Key Features


- 1 Die formed stainless steel spacer bracket** for strength and perfect alignment inner pipe.
Stainless steel bracket welded to inner stainless steel pipe and riveted to outer galvanized pipe. Welds between stainless steel and galvanized can be weak.
- 2 Hydraulically formed pipe ends** create a perfect fit for a safe & leak free vent system.
- 3 Type 430 – 28 gauge stainless steel** exhaust vent – corrosion resistant material for added safety and durability.
- 4 Hard tooled twist lock** connection system for easy secure installation of vent system.
- 5 Continuous laser (butt) weld** on inner and outer pipe for a safe leak-free vent system.
- 6 Durable G90 26 gauge galvanized material**
Black pipe is powder coated instead of (liquid paint) for a beautiful and extremely durable finish.
- 7 Listed with 95% of the fireplace manufactures.**
Call or email for current listings.

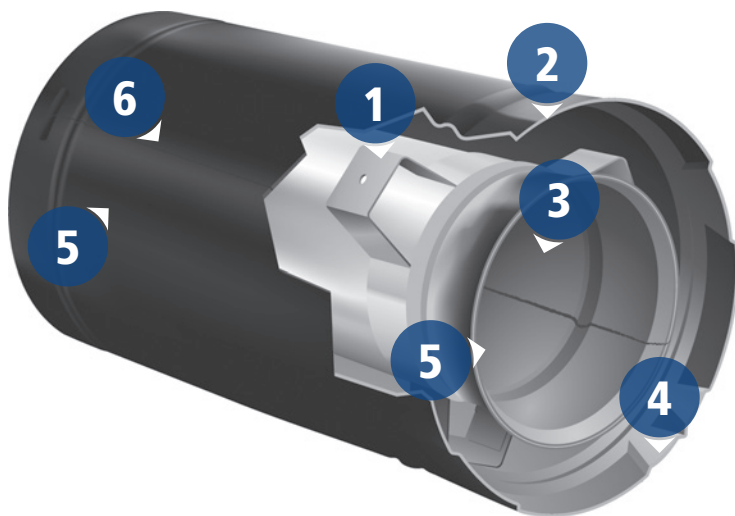


Patented USA #9,377,196
Patented USA #8,734,209
Patented USA #D562,959

Applications


Cathedral Ceiling Stove

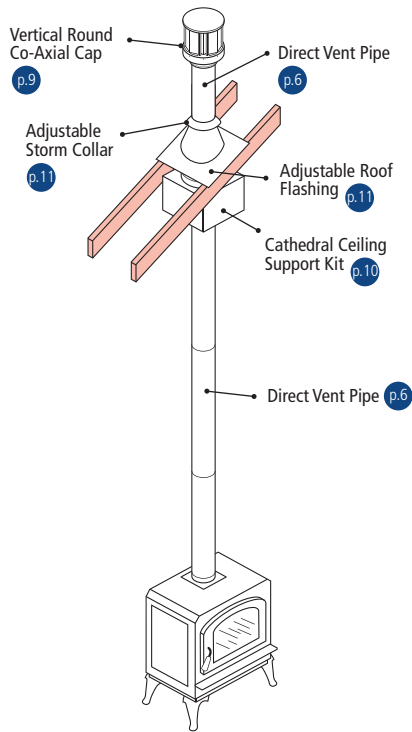


Co-Linear Insert

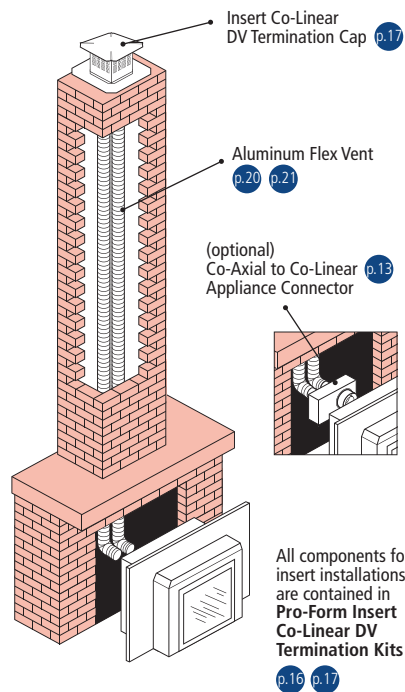


Fireplace Vertical Termination

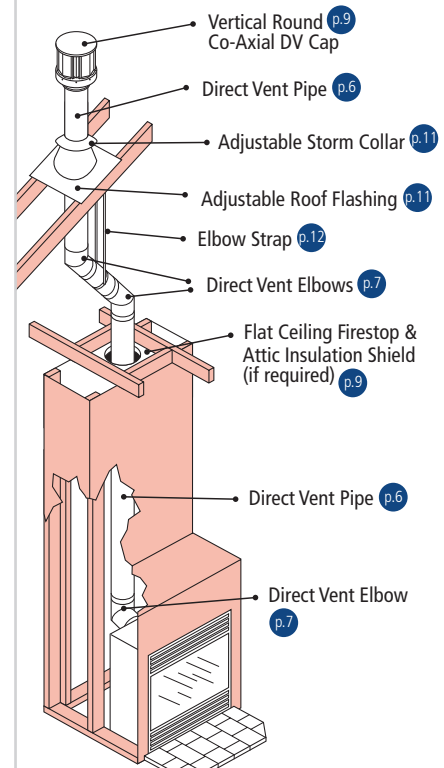


Masonry Chimney Stove Installation

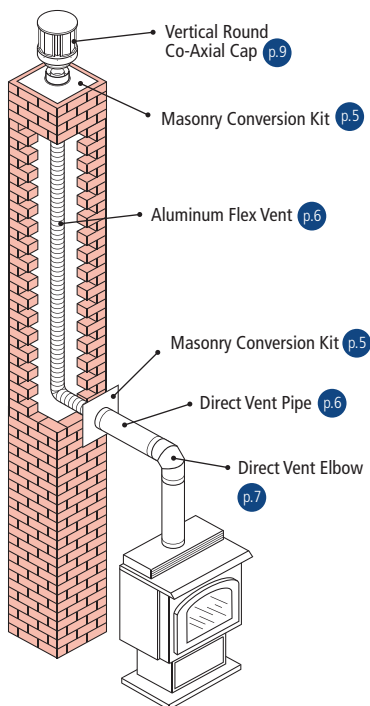

Metal Chimney Conversion

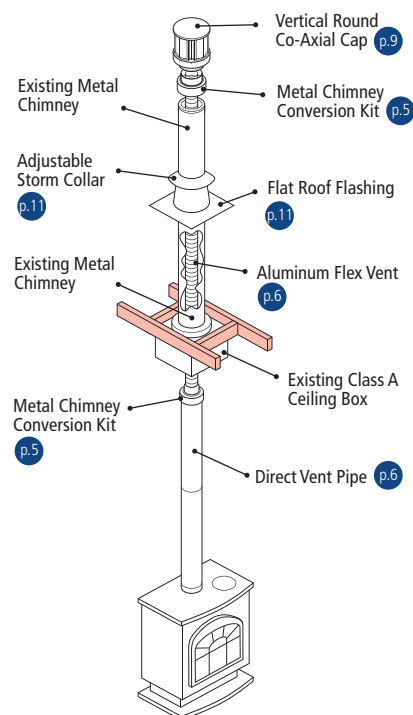


Stove Horizontal Termination

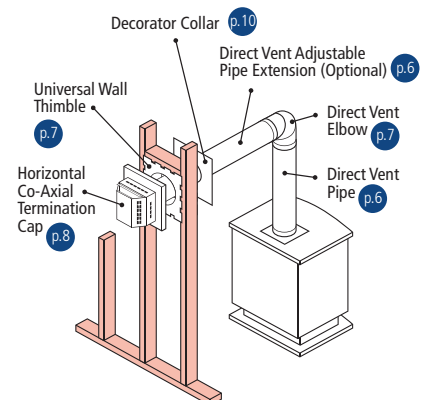

Pro-Form® Direct Vent System

Pro-Form®
Direct Vent System




Pro-Form® Horizontal Co-Axial DV Termination Kit

C B 1 10

	3' Flex	5' Flex	10' Flex
Diameter	Order #	Order #	Order #
4" inside 6 5/8"	DVF6-03KT	DVF6-05KT	DVF6-10KT
4" inside 7"	DVF7-03KT	DVF7-05KT	DVF7-10KT
5" inside 8"	DVF8-03KT	DVF8-05KT	DVF8-10KT

Kit includes: cap, firestop and 3', 5' or 10' of flex.



Pro-Form® Horizontal Co-Axial DV Termination Kit – With Pyramid Cap

C B 1 10

	3' Flex	5' Flex	10' Flex
Diameter	Order #	Order #	Order #
4" inside 6 5/8"	DVF6-03KTP	DVF6-05KTP	DVF6-10KTP
4" inside 7"	DVF7-03KTP	DVF7-05KTP	DVF7-10KTP
5" inside 8"	DVF8-03KTP	DVF8-05KTP	DVF8-10KTP


Kit includes: cap, firestop and 3', 5' or 10' of flex.



Pro-Form® Metal Class A Chimney Conversion Kit (Aluminum)

C B 1 6

Diameter	Order #	O.D.
4" inside 6 5/8" to 6" Class A	DVR6-CCK6	12"
4" inside 6 5/8" to 8" Class A	DVR6-CCK8	14.5"




Pro-Form® Masonry Chimney Conversion Kit (Aluminum)

C B 1 6

Diameter	Order #	O.D.
4" inside 6 5/8"	DVR6-MCK	10"
5" inside 8"	DVR8-MCK	12"

Kit includes: co-axial chimney flashing and co-axial masonry chimney adaptor and hose clamps.



Pro-Form® Co-Axial Chimney Flashing (Aluminum)

C B 1 6

Diameter	Order #
4" inside 6 5/8"	DVR6-CACF
5" inside 8"	DVR8-CACF

Pro-Form® Direct Vent System

Pro-Form®
Direct Vent System

GAS | Direct Vent



Pro-Form® Direct Vent Pipe				C	B	1	6
		Galvanized Outer Pipe		Black Powder Coat Outer Pipe			
Diameter	Length	Order #	Order #				
4" Inside 6 5/8"	6"	DVR6-06	DVR6-06B				
	9"	DVR6-09	DVR6-09B				
	12"	DVR6-12	DVR6-12B				
	18"	DVR6-18	DVR6-18B				
	24"	DVR6-24	DVR6-24B				
	36"	DVR6-36	DVR6-36B				
	48"	DVR6-48	DVR6-48B				
5" Inside 8"	6"	DVR8-06	DVR8-06B				
	9"	DVR8-09	DVR8-09B				
	12"	DVR8-12	DVR8-12B				
	18"	DVR8-18	DVR8-18B				
	24"	DVR8-24	DVR8-24B				
	36"	DVR8-36	DVR8-36B				
	48"	DVR8-48	DVR8-48B				



Pro-Form® Direct Vent Adjustable Pipe Extension				C	B	1	6
		Galvanized Outer Pipe		Black Powder Coat Outer Pipe			
Diameter	Length	Order #	Order #				
4" Inside 6 5/8"	4" to 8.5"	DVR6-08A	DVR6-08AB				
	4" to 16"	DVR6-16A	DVR6-16AB				
5" Inside 8"	4" to 8.5"	DVR8-08A	DVR8-08AB				
	4" to 16"	DVR8-16A	DVR8-16AB				



4"x6 5/8" Co-Axial Flex Extensions		C	B	4	6
Diameter	Order #				
4" Inside 6 5/8" x 3'	DVF6-03				
4" Inside 6 5/8" x 5'	DVF6-05				
4" Inside 6 5/8" x 10'	DVF6-10				
4" Inside 6 5/8" x 25"	DVF6-25				
4"x7" Co-Axial Flex Extensions		C	B	4	6
Diameter	Order #				
4" Inside 7" x 3'	DVF7-03				
4" Inside 7" x 5'	DVF7-05				
4" Inside 7" x 10'	DVF7-10				
4" Inside 7" x 25"	DVF7-25				
5"x8" Co-Axial Flex Extensions		C	B	4	6
Diameter	Order #				
5" Inside 8" x 3'	DVF8-03				
5" Inside 8" x 5'	DVF8-05				
5" Inside 8" x 10'	DVF8-10				
5" Inside 8" x 25"	DVF8-25				

Pro-Form® Direct Vent System

Pro-Form®
Direct Vent System



Pro-Form® Direct Vent Elbow




		Galvanized Outer Pipe	Black Powder Coat Outer Pipe
Diameter	Angle	Order #	Order #
4" Inside 6 5/8"	30 Degree	DVR6-E30	DVR6-E30B
	45 Degree	DVR6-E45	DVR6-E45B
	60 Degree	DVR6-E60	DVR6-E60B
	90 Degree	DVR6-E90	DVR6-E90B
5" Inside 8"	30 Degree	DVR8-E30	DVR8-E30B
	45 Degree	DVR8-E45	DVR8-E45B
	60 Degree	DVR8-E60	DVR8-E60B
	90 Degree	DVR8-E90	DVR8-E90B

Kingsman Direct Vent Elbow Adaptor



Diameter	Angle	Order #
7/4 to 6/4	22.5 Degree	DVR6-E22KM
7/4 to 6/4	22.5 Degree	DVR6-E22KMB




Pro-Form® Telescoping Wall Thimble Insulation Only



Diameter	Order #
4" inside 6 5/8"	DVR6-WTINS
5" inside 8"	DVR8-WTINS

Note: For insulating Wall Thimble for an air tight seal. Self adhesive backing. Sold in packages of 6.




Pro-Form® Universal Wall Thimble



Diameter	Framing Dimension			Order #
	1" clearance	2" clearance	3" clearance	
4" Inside 6 5/8"	9.5" x 9.5"	9.5" x 10.5"	9.5" x 11.5"	DVR6-WTU
5" Inside 8"	11" x 11"	11" x 12"	11" x 13"	DVR8-WTU

Note: Telescopes 4" to 8"




Pro-Form® Fire Stop (For Flex)



Diameter	Framing Dimension			Order #
	1" clearance	2" clearance	3" clearance	
4" Inside 6 5/8"	9.5" x 9.5"	9.5" x 10.5"	9.5" x 11.5"	DVF6-WT
4" Inside 7"	9.5" x 9.5"	9.5" x 10.5"	9.5" x 11.5"	DVF7-WT
5" Inside 8"	11" x 11"	11" x 12"	11" x 13"	DVF8-WT

Note: Telescoping firestop for 360 degree fire protection



Pro-Form® Wall Thimble Extension




Diameter	Order #
4" inside 6 5/8"	DV6-WTEXT
4" Inside 7"	DV7-WTEXT
5" inside 8"	DV8-WTEXT

Note: Extends telescoping collar 12" - 16" for use in a thicker wall.


Pro-Form® Direct Vent System

Pro-Form®
Direct Vent System


GAS | Direct Vent




Pro-Form® Horizontal Co-Axial Pyramid Style Caps for Rigid Pipe		C	B	1	6
Diameter	Order #				
4" inside 6 5/8"	DVR6-HCP				
4" Inside 7"	DVR7-HCP				
5" inside 8"	DVR8-HCP				



Pro-Form® Horizontal Co-Axial Pyramid Style Caps for Flex Pipe		C	B	1	6
Diameter	Order #				
4" inside 6 5/8"	DVF6-HCP				
4" Inside 7"	DVF7-HCP				
5" inside 8"	DVF8-HCP				



Pro-Form® Horizontal Co-Axial Termination Cap for Rigid Pipe		C	B	1	6
Diameter	Order #				
4" inside 6 5/8"	DVR6-HC				
4" Inside 7"	DVR7-HC				
5" inside 8"	DVR8-HC				



Pro-Form® Horizontal Co-Axial DV Termination Cap (For Flex)		C	B	1	6
Diameter	Order #				
4" inside 6 5/8"	DVF6-HC				
4" Inside 7"	DVF7-HC				
5" inside 8"	DVF8-HC	Note: Cap includes screws and caulk			




Pro-Form® Horizontal Termination Cap Wind/Heat Shroud		C	B	1	6
Diameter	Order #				
4" inside 6 5/8"	DVR6-SHRD				
5" inside 8"	DVR8-SHRD				



Pro-Form® Horizontal Termination Cap Wind/Heat Shroud For Pyramid Cap		C	B	1	6
Diameter	Order #				
4" inside 6 5/8"	DVR6-SHRDPYD				
5" inside 8"	DVR8-SHRDPYD				

Pro-Form® Direct Vent System

Pro-Form®
Direct Vent System



Pro-Form® 14" Snorkel Cap (Aluminum)

C B 1 6

Diameter	Order #
4" inside 6 5/8"	DVR6-SNK14
5" inside 8"	DVR8-SNK14

Pro-Form® 36" Snorkel Cap (Aluminum)

C B 1 6

Diameter	Order #
4" inside 6 5/8"	DVR6-SNK36
5" inside 8"	DVR8-SNK36



Pro-Form® Vertical Round Co-Axial DV Termination Cap

C B 1 6

Diameter	Order #
4" inside 6 5/8"	DVR6-VCH
5" inside 8"	DVR8-VCH




Pro-Form® Vertical Round Co-Axial Cap High Wind Guard

C B 1 6

Order #
DVR68-VWG


Note: Fits all diameters



Pro-Form® Vertical Co-Axial DV Termination Caps

C B 1 6


Diameter	Order #
4" inside 6 5/8"	DVR6-VCSB
4" Inside 7"	DVR7-VCSB
5" inside 8"	DVR8-VCSB



Pro-Form® Ceiling Firestop

C B 4 6

Diameter	Framing Dimension	Order #
4" inside 6 5/8"	9.5" x 9.5"	DVR6-CFS
5" inside 8"	11" x 11"	DVR8-CFS



Pro-Form® Attic Insulation Shield (Adjustable) with Firestop


C B 1 6

Diameter	Order #
4" inside 6 5/8"	DVR6-AIS
5" inside 8"	DVR8-AIS


Note: Adjusts 11"-21"

Pro-Form® Direct Vent System


Pro-Form®
Direct Vent System




Pro-Form® Cathedral Ceiling Support Kit			C	B	1	6
Diameter	Base	Order #				
4" inside 6 5/8"	12" x 12"	DVR6-CS				
5" inside 8"	13" x 13"	DVR8-CS				




Pro-Form® Decorator Wall Collar			C	B	4	6
Diameter	Base	Order #				
4" inside 6 5/8"	12" x 13"	DVR6-DC				
5" inside 8"	13" x 14"	DVR8-DC				



Pro-Form® Flat Ceiling Decorator Collar			C	B	4	6
Diameter	Base	Order #				
4" inside 6 5/8"	12" x 12"	DVR6-FCDC				
5" inside 8"	13" x 13"	DVR8-FCDC				



Pro-Form® SS Counter Flashing 4 Pc. Kit				C	B	4	6
Standard		Pyramid Cap					
Diameter	Order #	Diameter	Order #				
4" inside 6 5/8"	DVR6-CFK-SS	4" inside 6 5/8"	DVR6-CFK-SSPYD				
5" inside 8"	DVR8-CFK-SS	5" inside 8"	DVR8-CFK-SSPYD				



Pro-Form® SS Vinyl Siding Standoff				C	B	1	6
Diameter	I.D.	O.D.	Order #				
For Rigid							
4" inside 6 5/8"	14.5"	18.125"	DVR6-VSS				
5" inside 8"	14.75"	19"	DVR8-VSS				
For Flex							
4" inside 6 5/8"	14.5"	18.125"	DVR6-VSSFLX				
5" inside 8"	14.75"	19"	DVR8-VSSFLX				

Pro-Form® SS Vinyl Siding Standoff – With Pyramid Cap				C	B	1	6
Diameter	I.D.	O.D.	Order #				
For Rigid							
4" inside 6 5/8"	14.5"	18.125"	DVR6-VSSPYD				
5" inside 8"	15.75"	19"	DVR8-VSSPYD				
For Flex							
4" inside 6 5/8"	14.5"	18.125"	DVR6-VSSPYDFLX				
5" inside 8"	15.75"	19"	DVR8-VSSPYDFLX				

Pro-Form® Direct Vent System

Pro-Form®
Direct Vent System



Pro-Form® Roof Support




Diameter	Order #
4" inside 6 5/8"	DVR6-RS
5" inside 8"	DVR8-RS



Pro-Form® Adjustable Storm Collar




Diameter	Order #
6 5/8" to 8"	DVR68-SC



Pro-Form® Adjustable Roof Flashing 7/12 to 12/12




Diameter	Order #
4" inside 6 5/8"	DVR6-AF712
5" inside 8"	DVR8-AF712



Pro-Form® Adjustable Roof Flashing 0/12 to 6/12



Diameter	Order #
4" inside 6 5/8"	DVR6-AF012
5" inside 8"	DVR8-AF012



Pro-Form® Flat Roof Flashing



Diameter	Order #
4" inside 6 5/8"	DVR6-TCF
5" inside 8"	DVR8-TCF



Pro-Form® 6 5/8" to 8" Co-Axial Increaser (Aluminum)



Diameter	Order #
5" inside 8"	DVR6-R8



Pro-Form® 8" to 6 5/8" Co-Axial Reducer (Aluminum)



Diameter	Order #
5" inside 8"	DVR8-R6

Pro-Form® Direct Vent System

Pro-Form®
Direct Vent System

GAS | Direct Vent




Pro-Form® Vermont Castings DV Adaptors				C	B	1	6
		Aluminum		Black Powder Coat			
Diameter	Description	Order #	MSRP Price	Order #	MSRP Price		
4" to 6 5/8"	DV Vermont Castings Stove Adaptor	DVR6-STAVC	\$56.69	DVR6-STAVCB	\$82.67		



Pro-Form® Valor DV Adaptors				C	B	1	6
Diameter	Description	Order #	MSRP Price				
4" to 6 5/8"	Valor Stove Adaptor	DVR6-08A	\$56.69				



Pro-Form® Stove Adaptor / Starter Collar				C	B	1	6
Diameter	Description	Order #	MSRP Price				
7" to 6 5/8"	Starter Collar	DVR6-STA7	\$56.69				



Pro-Form® Rigid DV Pipe Adaptor			C	B	1	6
Diameter	Order #	MSRP Price				
4" inside 6 5/8"	DVR6-2DV	\$77.95				
5" inside 8"	DVR8-2DV	\$82.67				

Note: Connects other Manufacturers DV Pipe to Pro-Form® DV Pipe.



Pro-Form® Elbow Strap and Wall Strap					C	B	4	6
Elbow Strap			Wall Strap					
Diameter	Order #	MSRP Price	Order #	MSRP Price				
4" inside 6 5/8"	DVR6-ES	\$42.51	DVR6-WS	\$47.24				
5" inside 8"	DVR8-ES	\$42.51	DVR8-WS	\$47.24				

Note: Elbow and Wall Straps are sold in 4 packs; Wall Strap adjusts 1"-3" from wall




Napoleon DV Stove Adaptors			C	B	4	6
Diameter	Order #	MSRP Price				
4" inside 6 5/8"	DVR6-STANAP	\$56.69				
4" inside 7"	DVR6-NAPADP	\$56.69				
5" inside 8"	DVR8-STANAP	\$56.69				

Note: Adjusts 1"-3" from wall; Wall straps are sold in 4 packs

Pro-Form® DV Touch Up Paint			C	B	4	6
Description	Order #	MSRP Price				
12 oz	DVR-PAINT	\$54.33				

Pro-Form® Direct Vent System

Pro-Form®
Direct Vent System



18" 18"



Width - 8"
Length - 12"
Height - 9"



Width - 8"
Length - 12"
Height - 9"



Pro-Form® Co-Linear to Co-Axial Chimney Liner Termination Kit



Diameter

Order #

4" Inside 6 5/8" Co-Axial to 3" x 3" and 3" x 4" Co-Linear DVF34-TC6

Note: Kit includes Termination Connector and 18" x 18" Flashing

For use when converting from Co-Linear flex to Co-Axial rigid vent. Typically used to extend chimney termination. Each includes a 3" x 4" adaptor.

Pro-Form® Co-Axial to Co-Linear Adaptor (Aluminum)



Diameter

Order #

6 5/8" Co-Axial to 3" x 3" Co-Linear DVR6-A33

6 5/8" Co-Axial to 3" x 4" Co-Linear DVR6-A34

6 5/8" Co-Axial to 4" x 4" Co-Linear DVR6-A44

8 / 5" Co-Axial to 3" x 3" Co-Linear DVR8-A33

8 / 5" Co-Axial to 3" x 4" Co-Linear DVR8-A34

8 / 5" Co-Axial to 4" x 4" Co-Linear DVR8-A44

Pro-Form® Co-Linear to Co-Axial Adaptor (Aluminum)



Diameter

Order #

3" x 3" Co-Linear to 6 5/8" Co-Axial DVF33-A6

3" x 4" Co-Linear to 6 5/8" Co-Axial DVF34-A6

4" x 4" Co-Linear to 6 5/8" Co-Axial DVF44-A6

3" x 3" Co-Linear to 8 / 5" Co-Axial DVF33-A8

3" x 4" Co-Linear to 8 / 5" Co-Axial DVF34-A8

4" x 4" Co-Linear to 8 / 5" Co-Axial DVF44-A8

Pro-Form® Clearance Ring



Diameter

Order #

6 5/8" DVF6-CR

7" DVF7-CR

8" DVF8-CR

Note: For use with flexible DV. Maintains a 3" clearance.

Pro-Form® 5-Piece Co-Axial Insert Kit



Diameter

Order #

3" DVF33-6CAKT

Kit includes: cap, (1) 30' and (1) 4' length of flex, 18" x 18" Support Plate, 4" to 3" Reducer.

Pro-Form® 4-Piece Co-Axial Insert Kit



Diameter

Order #

4" DVF44-6CAKT

Kit includes: cap, (1) 30' and (1) 4' length of flex, 18" x 18" Support Plate.



DALSIN LINE®




Aluminum Flex Venting

"Dalsin Line"® aluminum flexible liners are used for venting category 1 and direct vent appliances. Manufactured using Type 3003 aluminum, this heavy 2-ply liner is made from .005" thick, high grade aluminum for a total thickness of .010".


Key Features

- 1** Type 3003 (.030") thickness Aluminum components
- 2** 2-ply, Type 3003 (.010") thickness
- 3** Durable Interlock flexible liner for superior strength

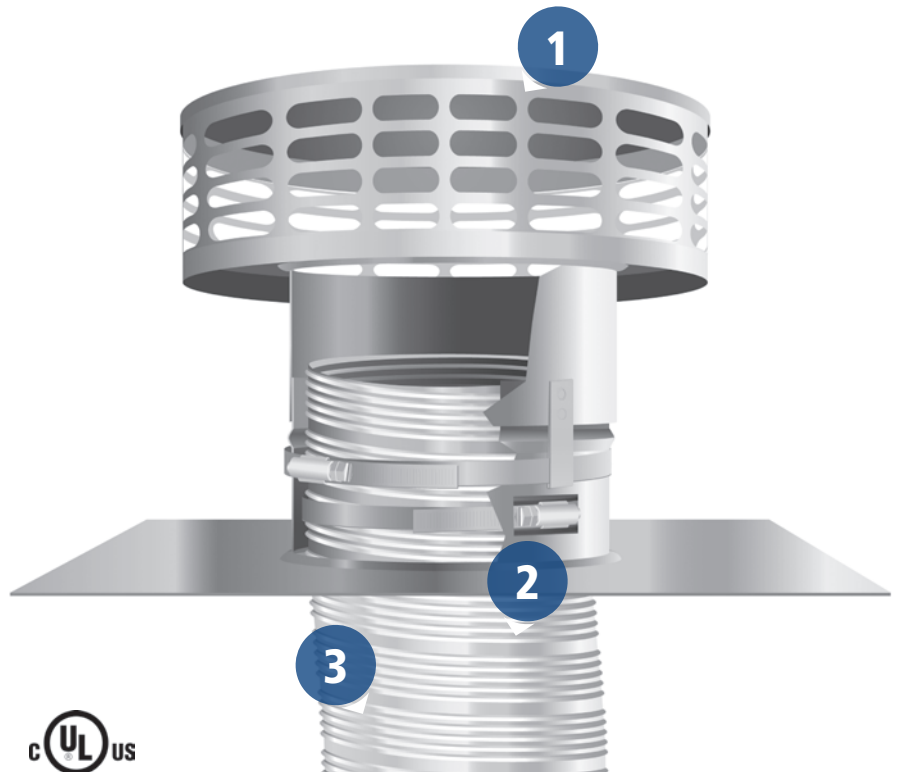


Applications


Gas Appliance Venting Into Masonry Chimney

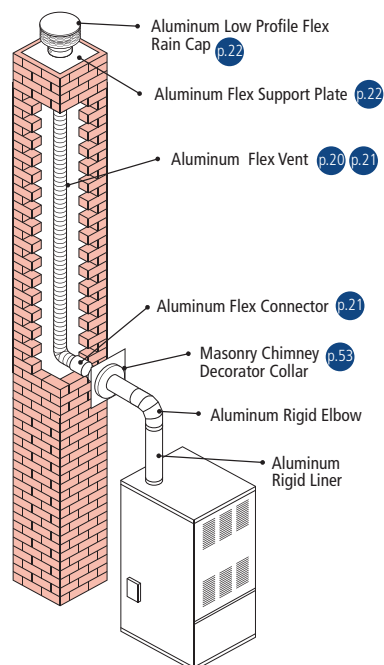


B-Vent Gas Insert

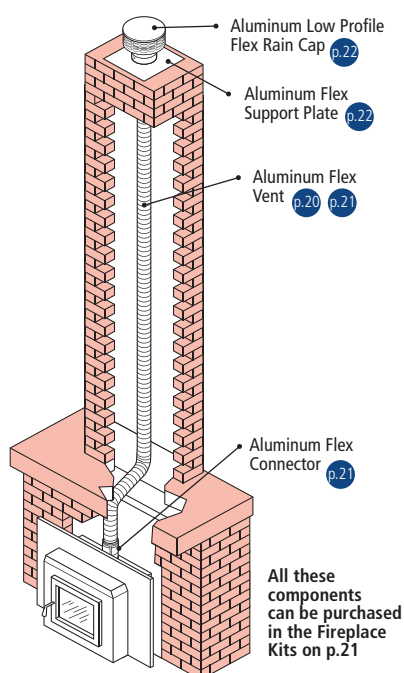

Direct Vent Gas Insert

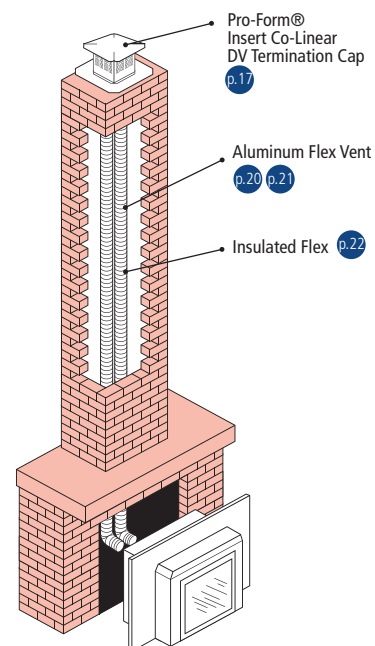


Back-to-back Application with Double Cap

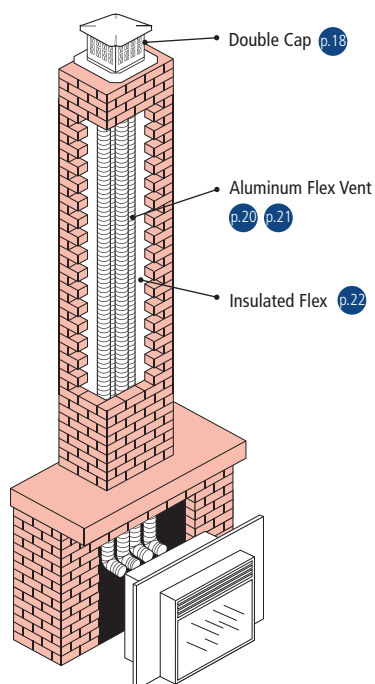

Aluminum Flex Venting

DALSIN LINE®

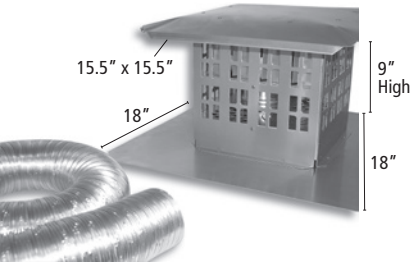


Pro-Form® Insert Co-Linear DV Termination Kit			
		Aluminum	Black Powder Coat
Diameter	Flex Included	Order #	Order #
3" x 3"	30' and 4'	942033430	942033430B
3" x 3"	2 ea. 30'	94203360	94203360B
3" x 3"	35' and 4'	942033435	942033435B
3" x 3"	2 ea. 35'	94203370	94203370B
3" x 4"	30' and 4'	942034430	942034430B
3" x 4"	2 ea. 30'	94203460	94203460B
3" x 4"	35' and 4'	942034435	942034435B
3" x 4"	2 ea. 35'	94203470	94203470B
4" x 4"	30' and 4'	942044430	942044430B
4" x 4"	2 ea. 30'	94204460	94204460B
4" x 4"	35' and 4'	942044435	942044435B
4" x 4"	2 ea. 35'	94204470	94204470B

Kit includes: cap, (2) 30' or 35' lengths of flex or (1) 30' or (1) 35' and (1) 4' flex



Pro-Form® Insert Co-Linear DV Termination Kit w/High Wind Cap/Square Base			
		Aluminum	Black Powder Coat
Diameter	Flex Included	Order #	Order #
3" x 3"	30' and 4'	942033430HWS	942033430HWSB
3" x 3"	2 ea. 30'	94203360HWS	94203360HWSB
3" x 3"	35' and 4'	942033435HWS	942033435HWSB
3" x 3"	2 ea. 35'	94203370HWS	94203370HWSB
3" x 4"	30' and 4'	942034430HWS	942034430HWSB
3" x 4"	2 ea. 30'	94203460HWS	94203460HWSB
3" x 4"	35' and 4'	942034435HWS	942034435HWSB
3" x 4"	2 ea. 35'	94203470HWS	94203470HWSB

Kit includes: cap, (2) 30' or 35' lengths of flex or (1) 30' or (1) 35' and (1) 4' flex

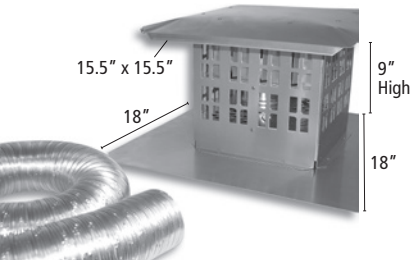

Pro-Form® Insulated Aluminum Flex Kits			
		Aluminum	Black Powder Coat
Diameter	Flex Included	Order #	Order #
3" x 3"	30' x 2	942103360	942103360B
3" x 3"	35' x 2	942103370	942103370B
3" x 4"	30' x 2 (4" Flex Insulated)	942103460	942103460B
3" x 4"	35' x 2	942103470	942103470B
4" x 4"	30' x 2	942104460	942104460B
4" x 4"	35' x 2	942104470	942104470B

Kit includes: cap, (2) 30' or 35' lengths of flex exhaust liner insulated


Aluminum Flex Venting

DALSIN LINE®

Pro-Form® Insulated Aluminum Flex Kits w/High Wind Cap/Square Base


		Aluminum	Black Powder Coat
Diameter	Flex Included	Order #	Order #
3" x 3"	30' x 2	942103360HWS	942103360HWSB
3" x 3"	35' x 2	942103370HWS	942103370HWSB
3" x 4"	30' x 2 (4" Flex Insulated)	942103460HWS	942103460HWSB
3" x 4"	35' x 2	942103470HWS	942103470HWSB

Kit includes: cap, (2) 30' or 35' lengths of flex exhaust liner insulated.

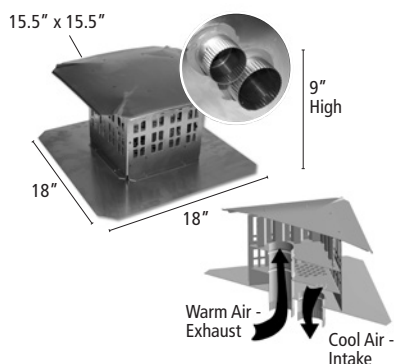

Pro-Form® Insert Co-Linear DV Termination Cap


		Aluminum	Black Powder Coat
Diameter	Order #	Order #	Order #
3" x 3"	940033	940033B	
3" x 4"	940034	940034B	
4" x 4"	940044	940044B	



Pro-Form® SS Vertical Round Co-Linear Cap


Diameter	Order #
3" x 3" and 3" x 4"	940034RDSS

Includes 3" x 4" adaptor


Pro-Form® Base for SS Vertical Round Co-Linear Cap


Base	Order #
12.5"	94830234RDSS
14.5"	94830434RDSS
17.5"	94830734RDSS



Pro-Form® SS Vertical Co-Linear Rectangle Caps


Diameter	Order #
3" x 3" and 3" x 4"	940034EC26SS

Note: Each cap comes with 3" x 4" adaptor.

Aluminum Flex Venting


DALSIN LINE®



Pro-Form® VCL Termination Cap with Stainless Steel Base



	8"x8" SS Base	8"x13" SS Base	13"x13" SS Base
Diameter	Order #	Order #	Order #
3" x3"	9400330808SS	9400330813SS	9400331313SS
3" x4"	9400340808SS	9400340813SS	9400341313SS
4" x4"	9400440808SS	9400440813SS	9400441313SS




Pro-Form® Insert Co-Linear DV Double Termination Cap



Diameter	Order #
3" x3"	940033DBL
3" x4"	940034DBL
4" x4"	940044DBL

Note: Used for back-to-back inserts.



Pro-Form® Round Co-Linear DV Termination Cap (with Square Base)



Diameter	Order #
3" x3"	940033HWS
3" x4"	940034HWS



Pro-Form® Vertical Round Co-Linear DV Termination Cap (with Round Base)



Diameter	Base	Order #
3" x3"	12.5	9400332RD
3" x3"	14.5	9400334RD
3" x3"	17.5	9400337RD
3" x4"	12.5	9400342RD
3" x4"	14.5	9400344RD
3" x4"	17.5	9400347RD





Pro-Form® Vertical Round Co-Linear DV Termination Cap (with No Base)



Diameter	Order #
3" x3"	940033HWN
3" x4"	940034HWN

Note: Separate base on page 19.

Aluminum Flex Venting

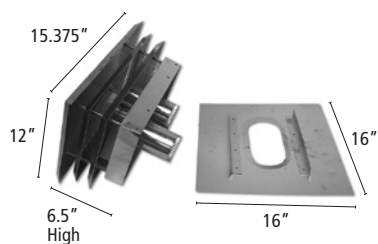DALSIN LINE®

Pro-Form® Vertical Co-Linear Regency DV Termination Cap


Diameter	Order #
3" x3" and 3" x4"	940034RC

Each Cap Includes 4"x3" Reducer.

Pro-Form® Vertical Square Base Only for Co-Linear Cap


Diameter	Base	Order #
3" x3"	18" x18"	940033HWPLT
3" x4"	18" x18"	940034HWPLT

Pro-Form® Vertical Round Base Only for Co-Linear Cap


Diameter	Base	Order #
3" x3"	12.5	94830233RD
3" x3"	14.5	94830433RD
3" x3"	17.5	94830733RD
3" x4"	12.5	94830234RD
3" x4"	14.5	94830434RD
3" x4"	17.5	94830734RD

Bat Resistant Screen Kit


Diameter	Order #
Square Cap	949812
Round Cap	949824

Note: For use on any Pro-Form cap to keep bats out!

Aluminum Flex Venting

DALSIN LINE®



Aluminum Flex Only – 25 Foot			C	B	1	16
	Without Ends	With Ends				
Size	Order #	Order #				
2"	95270225	–				
3"	95270325	95070325				
4"	95270425	95070425				
5"	95270525	95070525				
6"	95270625	95070625				
7"	95270725	95070725				
8"	95270825	95070825				

 Pallet quantities may vary. Call for exact amounts.



Aluminum Flex Only – 35 Foot			C	B	1	16
	Without Ends	With Ends				
Size	Order #	Order #				
3"	95270335	95070335				
4"	95270435	95070435				
5"	95270535	95070535				
6"	95270635	95070635				
7"	95270735	95070735				
8"	95270835	95070835				

Note: Larger diameters and custom lengths available; Call for pricing

 Pallet quantities may vary. Call for exact amounts.

Aluminum Flex Only – 50 Foot		C	B	1	12
	Without Ends				
Size	Order #				
3"	95270350				
4"	95270450				
6"	95270650				

 Pallet quantities may vary. Call for exact amounts.

Aluminum Flex – 10 Foot Extension			C	B	1	6
	Without Ends	With Ends				
Size	Order #	Order #				
3"	95270310	95070310				
4"	95270410	95070410				
5"	95270510	95070510				
6"	95270610	95070610				
7"	95270710	95070710				
8"	95270810	95070810				

 Box quantities may vary. Call for exact amounts.

Aluminum Flex Venting

DALSIN LINE®
2 Piece Flex Only – 50 Foot (2x25 Foot Sections)





	Without Ends	With Ends
Size	Order #	Order #
3"	95280350	95080350
3" / 4"	952803450	—
4"	95280450	95080450

Note: For use with fireplaces with air intakes
 Pallet quantities may vary. Call for exact amounts.

2 Piece Flex Only – 60 Foot (2x30 Foot Sections)





	Without Ends	With Ends
Size	Order #	Order #
3"	95280360	95080360
3" / 4"	952803460	—
4"	95280460	95080460

 Pallet quantities may vary. Call for exact amounts.

2 Piece Flex Only – 70 Foot (2x35 Foot Sections)





	Without Ends	With Ends
Size	Order #	Order #
3"	95280370	95080370
3" / 4"	952803470	—
4"	95280470	95080470

 Pallet quantities may vary. Call for exact amounts.

Fireplace Kit – 25 Foot





	Without Ends	With Ends
Size	Order #	Order #
3"	95250325	95050325
4"	95250425	95050425

 Pallet quantities may vary. Call for exact amounts.

Fireplace Kit – 35 Foot





	Without Ends	With Ends
Size	Order #	Order #
3"	95250335	95050335
4"	95250435	95050435

Fireplace Kit includes: Low Profile Rain Cap, 16x16 Top Plate, 2 Ply Flexible Aluminum Liner
 Pallet quantities may vary.

Aluminum Flex Connector





Size	Order #
3"	95090390
4"	95090490
5"	95090590
6"	95090690
7"	95090790
8"	95090890



Aluminum Flex Venting

DALSIN LINE®



Aluminum Reducer		C	B	4	6
Size	Order #				
4" x 3" Flat	91130403				
4" x 3" Tapered	91130403TPR				


See page 53 for tapered picture



Aluminum Flex Pull Cone		C	B	1	6
Size	Order #				
3"	95091				
4"	95094				



Aluminum Low Profile Flex Rain Cap		C	B	4	6
Size	Order #				
3"	91360300				
4"	91360400				
5"	91360500				
6"	91360600				
7"	91360700				
8"	91360800				



Aluminum Flex Support Plate – 16" x 16" with Hose Clamp		C	B	4	6
Size	Order #				
3"	95200316				
4"	95200416				
5"	95200516				
6"	95200616				
7"	95200716				
8"	95200816				



B-Vent Masonry Chim not rated for thru a combustible wall.

Aluminum Insulated Flex Connector – Call for part numbers and pricing.

Aluminum Insulated Flex		C	B	1	6
Size	Order #				
3" x 30 foot	9550030430				
3" x 35 foot	9550030435				
4" x 30 foot	9550040530				
4" x 35 foot	9550040535				
5" x 30 foot	9550050630				
5" x 35 foot	9550050635				
6" x 30 foot	9550060730				
6" x 35 foot	9550060735				
8" x 30 foot	9550080930				
8" x 35 foot	9550080935				

Note: Great for gas inserts!; Insulation = .25" Thick



02 Pellet



Bio Vent®

25

A collection of black Bio Vent components, including a large central vent cap with a slatted top and several smaller pipe sections, some showing a red interior lining.

BIO VENT®




Bio Vent®

Put an end to labor-intensive caulking during installation and costly return visits to replace corroded venting. Bio Vent® from BDM makes wood pellet stoves easier to sell, easier to install, and easier to maintain.

Key Features

- 1 **High Temperature Silicone Gasket** for a leak proof vent system. Eliminates need for caulk.
- 2 **Type 304 stainless steel**
- 3 **Hydraulically formed pipe ends** for perfect fit. Faster installation.
- 4 **Seamless laser weld.**
- 5 **Pre-punched holes for fasteners**
- 6 **Powder coat finish** for beautiful, scratch resistant finish

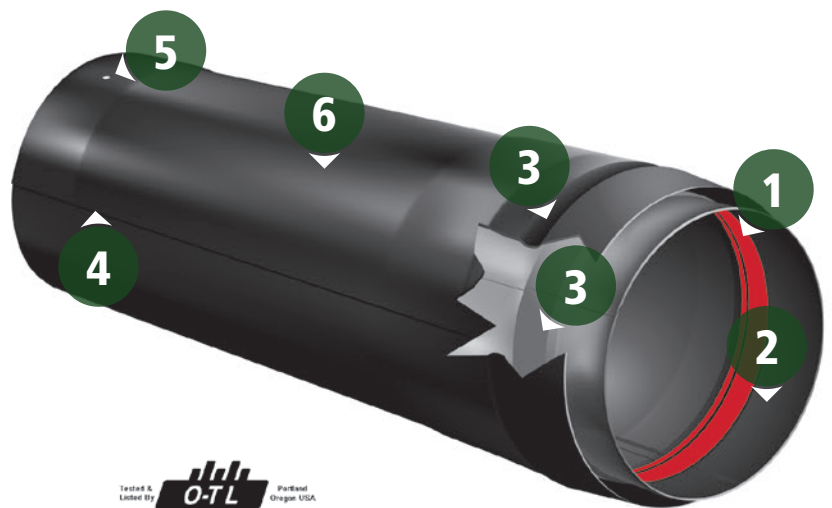


Type L Low Temperature Venting System UL641-2009
ULC/ORD C441-192, ULC S609-M89 Report NO 369-P-1b-2
Minimum Clearance 1" Air Space to Combustible Materials


Carton break down charge - #71009999 - 20%

Applications


Stove w/Attic Offset

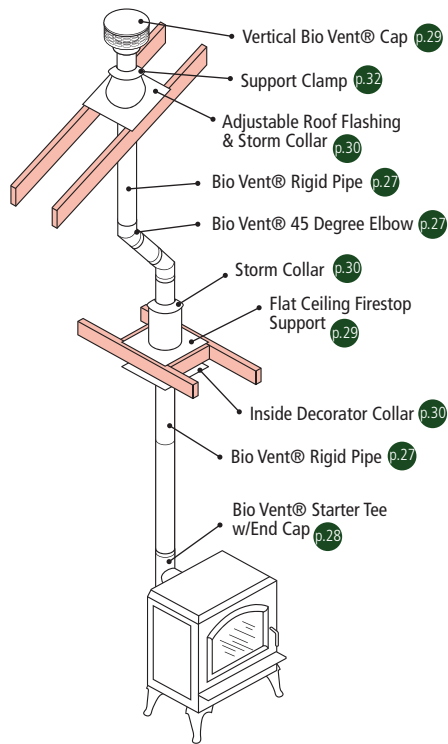


Cathedral Ceiling Stove

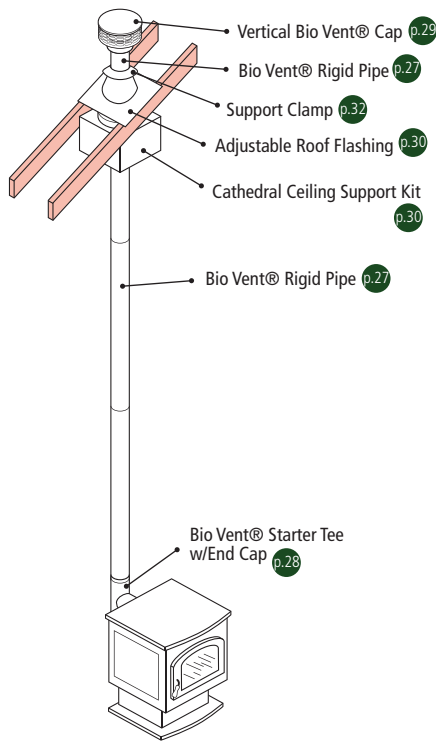


Stove Into Masonry Chimney

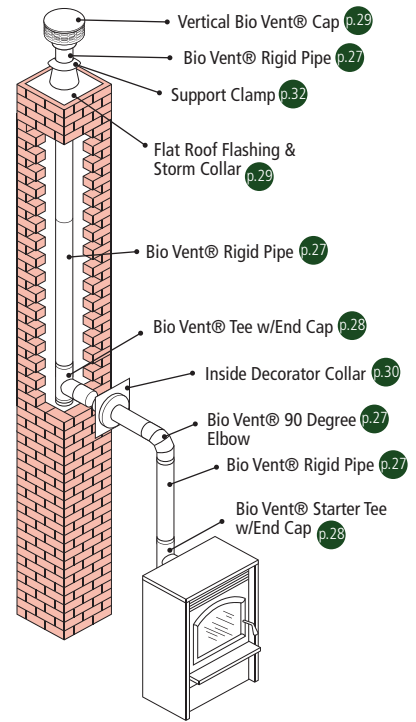


Pellet Insert Alternate

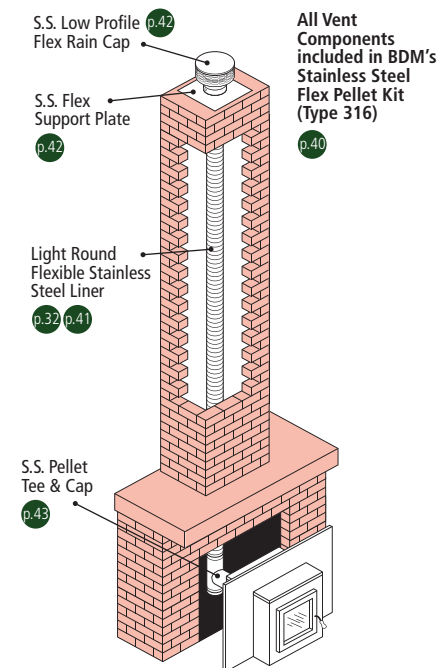

Pellet Insert

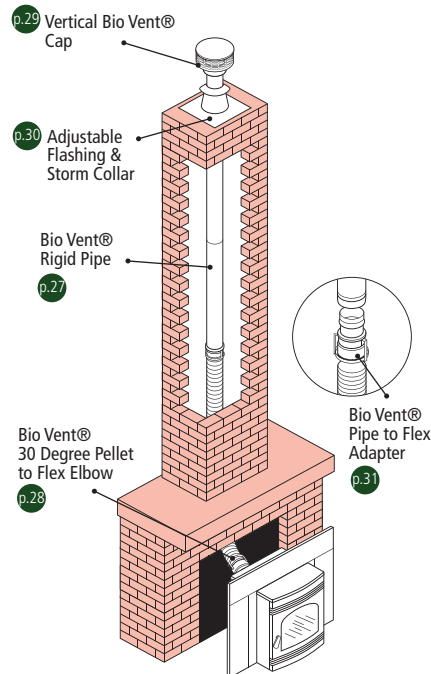

Horizontal Through Wall with Vertical Rise

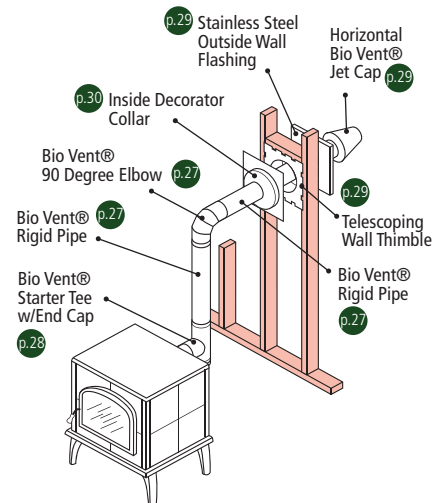



Wall Vent Kit - Type 304 Stainless Steel (Wood)



1" Clearance

Size	Order #
3"	PV3-WVKBNA
4"	PV4-WVKBNA

Kit Includes: Horizontal Jet Cap, Telescoping Wall Thimble, Outside Wall Flashing w/Gasket, Inside Decorator Collar w/Gasket. Order Starter Collar separately - pg 30.

Flat Ceiling Vent Kit - Type 304 Stainless Steel (Wood)



1" Clearance

Size	Order #
3"	PV3-FCKT
4"	PV4-FCKT

Kit Includes: Vertical Vent Cap, Flat Ceiling Firestop Support, Inside Decorator Collar w/Gasket, Support Clamp, Starter Tee with End Cap and Storm Collar

Rigid Pipe - Type 304 Stainless Steel (Wood)



Size	Order #
3" x 6"	PV3-06B
4" x 6"	PV4-06B
3" x 12"	PV3-12B
4" x 12"	PV4-12B
3" x 18"	PV3-18B
4" x 18"	PV4-18B
3" x 24"	PV3-24B
4" x 24"	PV4-24B
3" x 36"	PV3-36B
4" x 36"	PV4-36B
3" x 48"	PV3-48B
4" x 48"	PV4-48B

Adjustable Length Pipe - Type 304 Stainless Steel (Wood)



Size	Order #
3"	PV3-12AB
4"	PV4-12AB

Note: Provides 3" to 10" of adjustment when used with rigid sections of pipe.

45° Elbow - Type 304 Stainless Steel (Wood)



Size	Order #
3"	PV3-E45B
4"	PV4-E45B

Note: One piece inner flue

90° Elbow - Type 304 Stainless Steel (Wood)



Size	Order #
3"	PV3-E90B
4"	PV4-E90B

Note: One piece inner flue



Starter Elbow - Type 304 Stainless Steel (Wood)			C	B	6	6
	45° Powder Coat	90° Powder Coat				
Size	Order #	Order #				
3"	PV3-E45STB	PV3-E90STB				
4"	PV4-E45STB	PV4-E90STB				



30° Pellet to Flex Elbow - Type 304 Stainless Steel (Wood)			C	B	6	6
	Powder Coat					
Size	Order #					
3" to 4"	PV3-E30RFAD					



Ravelli® Starter Tee - Type 304 Stainless Steel (Wood)			C	B	3	6
	Powder Coat					
Size	Order #					
3" to 4"	PV4-TSTETB					

Note: Includes End Cap.



Tee with End Cap - Type 304 Stainless Steel (Wood)			C	B	3	6
	Powder Coat					
Size	Order #					
3" x 3"	PV3-TB					
3" Branch x 4" Tee Main	PV4-T3B					
4" to 4"	PV4-TB					

Note: Includes End Cap.

Tee Support #PV34-TS



Tee Support #PV34-TS

Starter Tee with End Cap - Type 304 Stainless Steel (Wood)			C	B	3	6
	Powder Coat					
Size	Order #					
3" x 3"	PV3-TSTB					
3" Branch x 4" Tee Main	PV4-TST3B					
4" x 4"	PV4-TSTB					
Travis® 4" x 4"	PV4-TSTTRVB					
Ravelli® 3" x 3"	PV3-TSTETB					

Note: Includes End Cap.



Tee Support #PV34-TS

Double Tee with (2) End Caps - Type 304 Stainless Steel (Wood)			C	B	3	6
	Powder Coat					
Size	Order #					
3" x 3"	PV3-TDBB					
3" Branch x 4" Tee Main	PV4-TDB3B					
4" to 4"	PV4-TDBB					

Note: For both horizontal and vertical cleaning access; Includes 2 End Caps per Tee.

Bio Vent® Wood Pellet Venting



End Cap - Type 304 Stainless Steel (Wood)



Stainless Steel

Size Order #

3" PV3-EC

4" PV4-EC

Co-Linear Insert Termination Cap - Type 304 Stainless Steel (Wood)



Diameter Order #

3"x3" and 3"x4" PV4-VCS34B

Each cap comes with a 3"x4" adaptor.

Vertical Cap - Type 304 Stainless Steel (Wood)



Size Order #

3" PV3-VCB

4" PV4-VCB

Horizontal Jet Cap - Type 304 Stainless Steel (Wood)



Size Order #

3" PV3-HJCB

4" PV4-HJCB

Galvanized Flat Ceiling Firestop Support w/Attic Insul. Shield & Storm Collar



1" Clearance

Size Framing Dimension Order #

3" 6.5" x 6.5" PV3-FCFS

4" 7.5" x 7.5" PV4-FCFS

Note: Includes support clamp; Telescopes 7" to 11"

Galvanized Telescoping Wall Thimble



1" Clearance

Size Framing Dimension Order #

3" 6.5" x 6.5" PV3-WT

4" 7.5" x 7.5" PV4-WT

Note: Telescopes 7" to 12"

24 Gauge Stainless Steel Outside Wall Flashing







1" Clearance

Size Framing Dimension Order #

3" 7.5" x 7.5" PV3-OWF

4" 8.5" x 8.5" PV4-OWF

Note: Includes Gasket

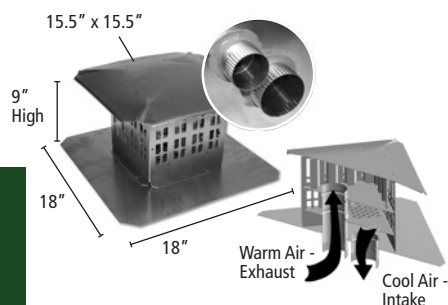



Galvanized Inside Decorator Collar			C	B	6	6
			1" Clearance			

Size	Framing Dimension	Order #
3"	7.5" x 7.5"	PV3-DC
4"	8.5" x 8.5"	PV4-DC

Note: Includes Gasket

Galvanized Cathedral Ceiling Support Kit			C	B	1	6
			1" Clearance			

Size	Framing Dimension	Order #
3"	7.5" x 7.5"	PV3-CCSKT
4"	8.5" x 8.5"	PV4-CCSKT

Note: Includes box, trim collar, and support clamp

Adjustable Flashing & Storm Collar				C	B	1	6
45° Powder Coat		90° Powder Coat					

Size	Order #	Size	Order #
3"	PV3-RF612	3"	PV3-RF06
4"	PV4-RF612	4"	PV4-RF06

Storm Collar Only		C	B	1	6
-------------------	--	---	---	---	---

Size	Order #
3"	PV3-SC
4"	PV4-SC

Collar Extension - Type 304 Stainless Steel (Wood)		C	B	6	6
--	--	---	---	---	---

Size	Order #
3"	PV3-EXT

Note: Used when appliance collar is too short for appliance adaptor.

Stove Specific Appliance Adaptor - Type 304 Stainless (Wood)		C	B	6	6
--	--	---	---	---	---

Size	Order #
Harman®	PV3-ADHSB
Travis®	PV4-ADTRVB
Travis® AGP / Ravelli®	PV3-ADETB
Quadrafire® 4" to 3"	PV3-ADQFB

Appliance Adaptor - Type 304 Stainless Steel (Wood)		C	B	6	6
---	--	---	---	---	---

Size	Order #
3"	PV3-ADB
3.25"	PV3-ADOB
4"	PV4-ADB
4.25"	PV4-ADOB

Appliance Adaptor Increaser - Type 304 Stainless Steel (Wood)		C	B	6	6
---	--	---	---	---	---

Size	Order #
3" to 4"	PV3-X4B



Class "A" Pipe Adaptor/Incraser/Masonry Adaptor - Type 304 S.S. (Wood)



Size	Size	Order #
3" x 3" to 6" / 8"	3" Rigid to 3" Flex	PV3-MAD368B
3" x 4" to 6" / 8"	3" Rigid to 4" Flex	PV3-MAD468B
4" x 4" to 6" / 8"	4" Rigid to 4" Flex	PV4-MAD468B

Note: Fits both 6" & 8" Class "A" pipe or masonry thimble; This one item is a dual function adaptor.



Flex to Pipe Adaptor Incraser - Type 304 Stainless Steel (Wood)



Size	Order #
3" x 3"	PVF3-PAD3B
3" to 4"	PVF3-PAD4B
4" to 4"	PVF4-PAD4B



Pipe to Flex Adaptor Incraser - Type 304 Stainless Steel (Wood)



Size	Order #
3" x 3"	PV3-FAD3B
3" to 4"	PV3-FAD4B
4" to 4"	PV4-FAD4B




Deluxe Terminator - Type 304 Stainless Steel (Wood)



Length 24"		Length 36"	
Diameter/Take Off	Order #	Diameter/Take Off	Order #
3"/2"	PV3-DTERM242	3"/2"	PV3-DTERM362
4"/2"	PV4-DTERM242	4"/2"	PV4-DTERM362
3"/3"	PV3-DTERM243	3"/3"	PV3-DTERM363
4"/3"	PV4-DTERM243	4"/3"	PV4-DTERM363

Note: Fresh air brought in between inner and outer tube; Includes 2.5' of aluminum flex



Fresh Air Intake Kit



Size	Order #
2"	PV2-FAKT
3"	PV3-FAKT

Kit Includes: 5' of Alum Flex Liner, Vent Hood, & Flex Decorator Collar



Fresh Air Intake Kit with Insulated Flex



Size	Order #
2"	PV2-FAKTINS
3"	PV3-FAKTINS

Kit Includes: 5' of Alum Insulated Flex Liner, Vent Hood, & Flex Decorator Collar



Aluminum Flex Only - Without Ends



Size	Order #
2" x 25'	95270225

Note: For Fresh Air Intake Only



Type 316 Stainless Steel Flex Liner			C	B	1	6
Size	Order #					
3" x 10'	SF3-10					
3" x 25'	SF3-25					
3" x 35'	SF3-35					
4" x 10'	SF4-10					
4" x 25'	SF4-25					
4" x 35'	SF4-35					



Aluminum Insulated Flex			C	B	1	6
Size	Order #					
2" / 3" x 30'	9550020330					
3" / 4" x 30'	9550030430					


Note: Great for fresh air intake!; Insulation = .25" Thick



Galvanized Vertical Support Clamp			C	B	6	6
Size	Order #					
3"	PV3-VSC					
4"	PV4-VSC					



Galvanized Adjustable Wall Strap			C	B	6	6
Size	Order #					
3"	PV3-WS					
4"	PV4-WS					



Chase Box - 1" Clearance			C	B	1	6
Size	Dimension	Order #				
3"	6" x 6"	PV3-CB				
4"	7" x 7"	PV4-CB				



Replacement Gaskets			C	B	4	6
Size	Order #					
3"	PV3-GASKET					
4"	PV4-GASKET					



Touch Up Paint			C	B	4	6
Color	Order #					
Black	PV-PAINT					

Screw Package			C	B	4	6
Description	Order #					
100 per package	PV-SP					

Spray Touch-up Paint			C	B	4	6
Description	Order #					
4.2 oz	PV-PAINTAC					



03 Wood Burning



Light SS Flexible Liner 35

24Ga SS Rigid Liner & Fittings 47

26Ga SS Black Single-Wall Stove Pipe 55

Air-A-Lator® 59

Insul-Flue® 61



DALSIN LINE®



Light Stainless Flexible Liner

"Dalsin Line"® light flexible liner is listed for chimney relining and is suitable for wood, pellet, gas, oil, and coal applications. This liner is manufactured using .005" thick Type 316L stainless steel and backed by a limited lifetime warranty. All components are made from Type 316L stainless steel and are designed for quick and easy installation.

Key Features

Professional Grade Materials Provide Ultimate in Safety and Performance for a Lifetime

- All flex system components are made from 24 gauge, type 316L Stainless Steel
- Entire flex system is warrantied for life
- U.L. and U.L.C. Listed to UL1777 standards for chimney liner

1 Low-Profile Termination Provides Low Visibility But High Performance

- A stamped design provides finished appearance
- Many other termination styles available

2 Ultimate Liner Construction Provides Lifetime Durability and Safety


- Made with .005" thick, type 316L stainless steel
- Professional grade materials make liner ideal for multiple liner applications

3 New and Improved Strongest Liner on the Market

- Made with the thickest materials in the "light" flex category
- More flexible
- Stronger lock for durability

4 Fast, Fastener-Free Installation


- All components have factory integrated stainless steel hose clamps for safe and strong connections
- No tools or fasteners needed for installation

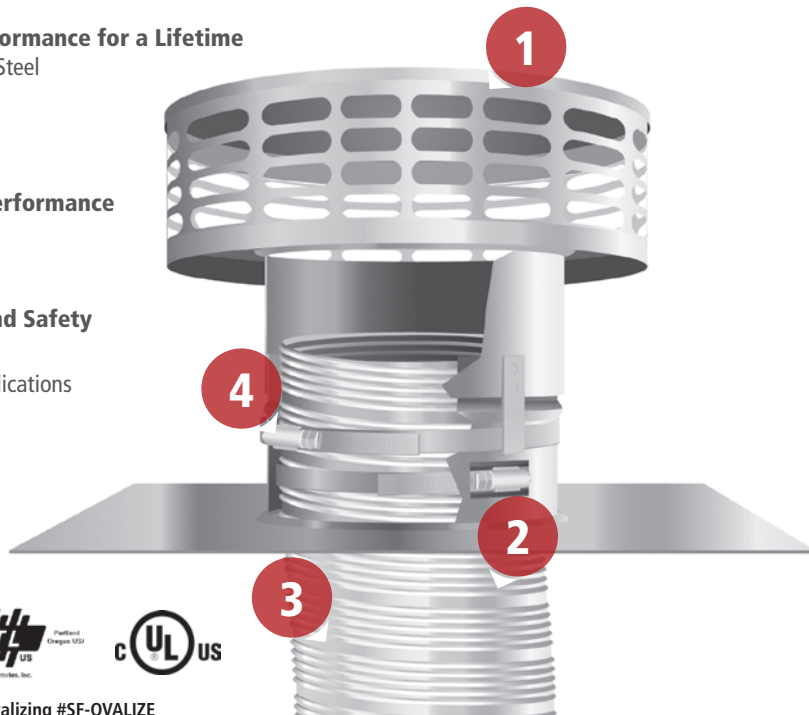


Custom Ovalizing #SF-OVALIZE

Applications


Stove Vertical Termination

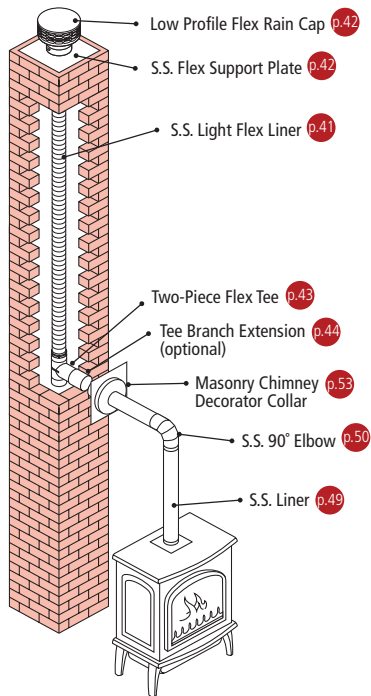


Appliance to Chimney Termination

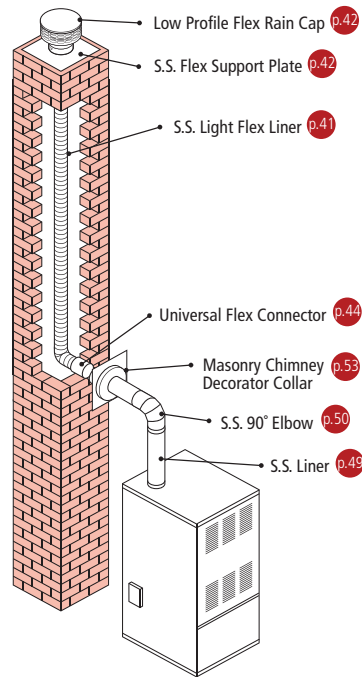

Fireplace Insert with Insulation Termination

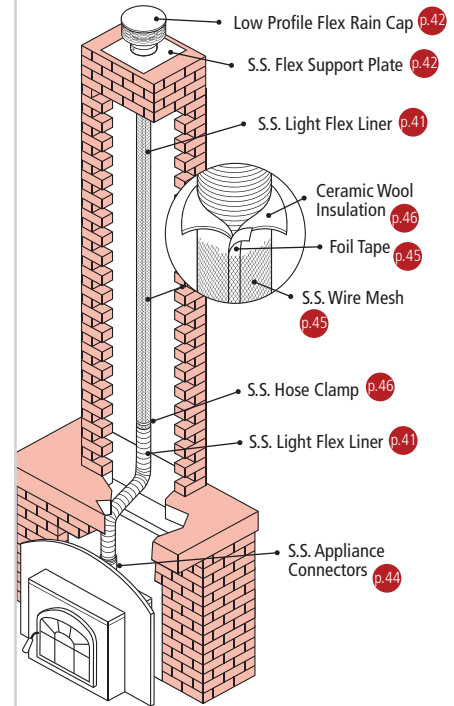

Fireplace Insert Termination

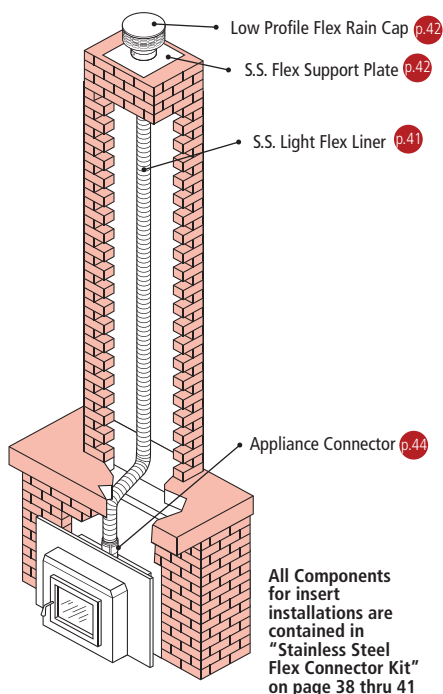

Build-Your-Own Kits (SS Flex Connector Kit)

DALSIN LINE®

BDM will assemble a kit just the way you want it! Simply pick the length of liner you need and then choose from the different cap, support plate and connector options below. Call BDM today for pricing and to place your order.


Standard kits available on page 38.



Standard Kit


Kit Options

SS Flex Liner



or

Pre Insulated Liner



+

Low Profile Cap



+

Support Plate



+

Universal Connector



or

or

or

Choose a length

15'

18'

20'

25'

30'

35'

Choose a size

3"

4"

5"

5.5"

6"

7"


8"

Choose a cap

Round w/Screen (Add: SC)

Round (Add: RC)

Square w/Hinge (Add: HC)



Add the above letters at the end of the SS Kit part number for fireplace style cap.

Choose a support plate

9"x9"

9"x13"

13"x13"

13"x18"

16"x16"

18"x18"

24"x24"

Choose a Connector

Stove
Connector



Insert
Connector




Locking Insert
Connector



30° or 45°
Elbow



Offset
Adaptor



Call for pricing on our Build-Your-Own kits and to place order.

Other sizes/options available - call BDM for more information.

Light SS Flex Liner

DALSIN LINE®



Inner: .005 316 Stainless Steel

Outer: .005 316 Stainless Steel

Insulation: 0.50"

Light SS Pre Insulated Flex Only (Type 316L)



Size	Order #	Order #
	25 Foot	35 Foot
4" diameter	SF4-25INS	SF4-35INS
5" diameter	SF5-25INS	SF5-35INS
5.5" diameter	SF55-25INS	SF55-35INS
6" diameter	SF6-25INS	SF6-35INS
8" diameter	SF8-25INS	SF8-35INS

Note: Add 1.5" for Outside Dimension.



Note:
Kits come with Low Profile Cap –
Substitute cap at no additional charge.

Round w/Screen (Add: SC) after kit part number

Round w/No Screen (Add: RC) after kit part number

Square w/Hinge Cap (Add: HC) after kit part number

Light SS Pre Insulated Flex Connector Kits (Type 316L)



Size	Order #	Order #
	25 Foot	35 Foot
4" diameter	SF4-25CKTINS	SF4-35CKTINS
5" diameter	SF5-25CKTINS	SF5-35CKTINS
5.5" diameter	SF55-25CKTINS	SF55-35CKTINS
6" diameter	SF6-25CKTINS	SF6-35CKTINS
8" diameter	SF8-25CKTINS	SF8-35CKTINS

Kit includes: Pre Insulated SS Flexible Liner, Termination Cap, 16"x16" Top Plate, Universal Connector



Note:
Kits come with Low Profile Cap – Substitute
cap at no additional charge.

Round w/Screen (Add: SC) after kit part number

Round w/No Screen (Add: RC) after kit part number

Square w/Hinge Cap (Add: HC) after kit part number

Light SS Pre Insulated Flex Connector – Call for part
numbers and pricing.

Light SS Pre Insulated Two-Piece Flex Tee Kits (Type 316L)



Size	Order #	Order #
	25 Foot	35 Foot
4" diameter	SF4-25TKTINS	SF4-35TKTINS
5" diameter	SF5-25TKTINS	SF5-35TKTINS
5.5" diameter	SF55-25TKTINS	SF55-35TKTINS
6" diameter	SF6-25TKTINS	SF6-35TKTINS
8" diameter	SF8-25TKTINS	SF8-35TKTINS

Kit includes: Pre Insulated SS Flexible Liner, Termination Cap, 16"x16" Top Plate, Two-Piece Flex Tee, Flex Tee Cap

Light SS Flex Liner

DALSIN LINE®



Custom Ovalizing #SF-OVALIZE

Note:
Kits come with Low Profile Cap –
Substitute cap at no additional charge.

Round w/Screen (Add: SC) after
kit part number

Round w/No Screen (Add: RC) after
kit part number

Square w/Hinge Cap (Add: HC) after
kit part number



Stainless Steel Flex Connector Kit (Type 316L)



Size	Order #	Order #
	15 Foot	18 Foot
3" diameter	SF3-15CKT	SF3-18CKT
4" diameter	SF4-15CKT	SF4-18CKT
5" diameter	SF5-15CKT	SF5-18CKT
5.5" diameter	SF55-15CKT	SF55-18CKT
6" diameter	SF6-15CKT	SF6-18CKT
7" diameter	SF7-15CKT	SF7-18CKT
8" diameter	SF8-15CKT	SF8-18CKT
	20 Foot	25 Foot
3" diameter	SF3-20CKT	SF3-25CKT
4" diameter	SF4-20CKT	SF4-25CKT
5" diameter	SF5-20CKT	SF5-25CKT
5.5" diameter	SF55-20CKT	SF55-25CKT
6" diameter	SF6-20CKT	SF6-25CKT
7" diameter	SF7-20CKT	SF7-25CKT
8" diameter	SF8-20CKT	SF8-25CKT
	30 Foot	35 Foot
3" diameter	SF3-30CKT	SF3-35CKT
4" diameter	SF4-30CKT	SF4-35CKT
5" diameter	SF5-30CKT	SF5-35CKT
5.5" diameter	SF55-30CKT	SF55-35CKT
6" diameter	SF6-30CKT	SF6-35CKT
7" diameter	SF7-30CKT	SF7-35CKT
8" diameter	SF8-30CKT	SF8-35CKT

Kit includes: SS Flexible Liner, Termination Cap, 16"x16" Top Plate, Universal Connector
 Standard pallet quantity is 6 but some sizes may vary. Call for exact amounts.

Oval to Round Stainless Steel Flex Adaptor



Size (Oval to Round)	Order #
5.5" to 6"	SF55-ORA
6" to 6"	SF6-ORA
8" to 8"	SF8-ORA

Light SS Flex Liner

DALSIN LINE®



Custom Ovalizing #SF-OVALIZE

Note:
Kits come with Low Profile Cap –
Substitute cap at no additional charge.

Round w/Screen (Add: SC) after
kit part number

Round w/No Screen (Add: RC) after
kit part number

Square w/Hinge Cap (Add: HC) after
kit part number

Stainless Steel Two-Piece Flex Tee Kit (Type 316L)



Size	Order #	Order #
	15 Foot	18 Foot
3" diameter	SF3-15TKT	SF3-18TKT
4" diameter	SF4-15TKT	SF4-18TKT
5" diameter	SF5-15TKT	SF5-18TKT
5.5" diameter	SF55-15TKT	SF55-18TKT
6" diameter	SF6-15TKT	SF6-18TKT
7" diameter	SF7-15TKT	SF7-18TKT
8" diameter	SF8-15TKT	SF8-18TKT
	20 Foot	25 Foot
3" diameter	SF3-20TKT	SF3-25TKT
4" diameter	SF4-20TKT	SF4-25TKT
5" diameter	SF5-20TKT	SF5-25TKT
5.5" diameter	SF55-20TKT	SF55-25TKT
6" diameter	SF6-20TKT	SF6-25TKT
7" diameter	SF7-20TKT	SF7-25TKT
8" diameter	SF8-20TKT	SF8-25TKT
	30 Foot	35 Foot
3" diameter	SF3-30TKT	SF3-35TKT
4" diameter	SF4-30TKT	SF4-35TKT
5" diameter	SF5-30TKT	SF5-35TKT
5.5" diameter	SF55-30TKT	SF55-35TKT
6" diameter	SF6-30TKT	SF6-35TKT
7" diameter	SF7-30TKT	SF7-35TKT
8" diameter	SF8-30TKT	SF8-35TKT

Kit includes: SS Flexible Liner, Termination Cap, 16"x16" Top Plate, Two-Piece Flex Tee, Flex Tee Cap
 Standard pallet quantity is 6 but some sizes may vary. Call for exact amounts.



Stainless Steel Flex Pellet Kit (Type 316L)



Size	Order #	Order #
	25 Foot	35 Foot
3" diameter	SF3-25PKT	SF3-35PKT
4" diameter	SF4-25PKT	SF4-35PKT
4" / 3" diameter*	SF43-25PKT	SF43-35PKT

*4"/3" Kit sold with 4" liner and 4" tee main with 3" take off.

Standard pallet quantity is 6 but some sizes may vary. Call for exact amounts.

Note:
Kits come with Low Profile Cap –
Substitute cap at no additional charge.

Round w/Screen (Add: SC) after
kit part number

Round w/No Screen (Add: RC) after
kit part number

Square w/Hinge Cap (Add: HC) after
kit part number

Light SS Flex Liner

DALSIN LINE®




Custom Ovalizing #SF-OVALIZE

Note: 10 foot maximum length applies to 9", 10" and 12" diameter liners.



Kit includes: SS Flexible Liner, Termination Cap with Base, Universal Connector



Light Round Flexible Stainless Steel Liner (Type 316L)



	25 Foot Length	35 Foot Length	Per Foot
Diameter	Order #	Order #	Order #
3"	SF3-25	SF3-35	SF3-01
4"	SF4-25	SF4-35	SF4-01
5"	SF5-25	SF5-35	SF5-01
5.5"	SF55-25	SF55-35	SF55-01
6"	SF6-25	SF6-35	SF6-01
7"	SF7-25	SF7-35	SF7-01
8"	SF8-25	SF8-35	SF8-01
9"	—	—	SF9-01
10"	—	—	SF10-01
12"	—	—	SF12-01

Standard pallet quantity is 6 but some sizes may vary. Call for exact amounts.

SS Flex Liner Kit for Zero Clearance Fireplace Installation



Size	Support Plate	Order #
6" x 15'	12.5"	SF6-15ZCKT12
6" x 20'	12.5"	SF6-20ZCKT12
6" x 25'	12.5"	SF6-25ZCKT12
6" x 35'	12.5"	SF6-35ZCKT12
6" x 15'	14.5"	SF6-15ZCKT14
6" x 20'	14.5"	SF6-20ZCKT14
6" x 25'	14.5"	SF6-25ZCKT14
6" x 35'	14.5"	SF6-35ZCKT14
6" x 15'	17.5"	SF6-15ZCKT17
6" x 20'	17.5"	SF6-20ZCKT17
6" x 25'	17.5"	SF6-25ZCKT17
6" x 35'	17.5"	SF6-35ZCKT17

SS Flex Liner Base Only for Zero Clearance Fireplace Installation



Size	Order #
12.5" Round Base for 6" SS Flex	SF6-2RD
14.5" Round Base for 6" SS Flex	SF6-4RD
17.5" Round Base for 6" SS Flex	SF6-7RD

Hinge Cap (Type 316L)



		16" x 16" Support Plate	18" x 18" Support Plate
Diameter	Cap Size	Order #	Order #
3"	9" x 9"	SF3-HC1616	—
4"	9" x 9"	SF4-HC1616	—
5"	9" x 9"	SF5-HC1616	—
5.5"	9" x 9"	SF55-HC1616	—
6"	9" x 9"	SF6-HC1616	—
7"	13" x 13"	—	SF7-HC1818
8"	13" x 13"	—	SF8-HC1818

Note: Available with support plate frame. Call for price.



24 Gauge Flex Rain Cap (Type 316L)			C	B	4	6
	With Mesh	Without Mesh				
Diameter	Order #	Order #				
3"	SF3-SC	SF3-RC				
4"	SF4-SC	SF4-RC				
5"	SF5-SC	SF5-RC				
5.5"	SF55-SC	SF55-RC				
6"	SF6-SC	SF6-RC				
7"	SF7-SC	SF7-RC				
8"	SF8-SC	SF8-RC				
9"	SF9-SC	SF9-RC				
10"	SF10-SC	SF10-RC				
12"	SF12-SC	SF12-RC				

Note: This item is available with or without mesh.




24 Gauge Low Profile Flex Rain Cap (Type 316L)			C	B	4	6
Size	Order #					
3"	SF3-LPC					
4"	SF4-LPC					
5"	SF5-LPC					
5.5"	SF55-LPC					
6"	SF6-LPC					
7"	SF7-LPC					
8"	SF8-LPC					
9"	SF9-LPC					
10"	SF10-LPC					
12"	SF12-LPC					



24 Gauge/18 Gauge Stainless Steel Flex Support Plate			C	B	4	6
Size	Gauge	Order #				
9"x9"	24	SF** - SP99				
9"x13"	24	SF** - SP913				
13"x13"	24	SF** - SP1313				
13"x18"	24	SF** - SP1318				
16"x16"	24/18	SF** - SP1616				
18"x18"	24/18	SF** - SP1818				
24"x24"	18	SF** - SP2424				

Note: All support plates 9" and above will be made with 18 gauge. **specify two digit hole size (6"=06 10"=10)

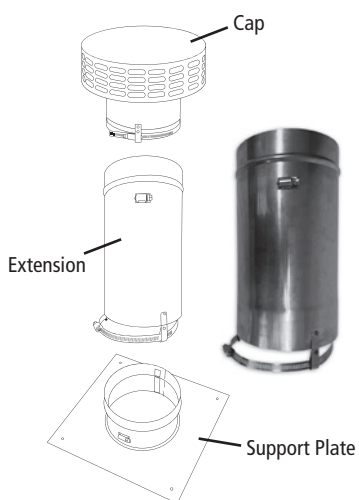

Support Plate Extension					
Size	Order #				
6" x 1'	SF6-SPEXT1				
6" x 2'	SF6-SPEXT2				
6" x 3'	SF6-SPEXT3				
6" x 4'	SF6-SPEXT4				
Support plate extensions for use with 6" insulated liner applications					
8" x 1'	SF8-SPEXT1				
8" x 2'	SF8-SPEXT2				
8" x 3'	SF8-SPEXT3				
8" x 4'	SF8-SPEXT4				



Stainless Steel Support Plate with 18 Gauge Frame



Size	Order #
9"x9"	SF** - SPF99
9"x13"	SF** - SPF913
13"x13"	SF** - SPF1313
13"x18"	SF** - SPF1318
16"x16"	SF** - SPF1616
18"x18"	SF** - SPF1818
24"x24"	SF** - SPF2424

Note: Frame will be spot welded to the support plate. **specify two digit hole size (6"=06 10"=10)



24 Gauge Pellet Tee (Type 316L)



Size	Order #
3"	SF3-PT
4"	SF4-PT
4" / 3"	SF34-PT

4" / 3" = 4" tee main with 3" take off. End Cap not included.



24 Gauge Two-Piece Flex Tee (Type 316L)



Size	Order #
3"	SF3-T
4"	SF4-T
5"	SF5-T
5.5" with 6" Branch	SF55-T6
6"	SF6-T
7"	SF7-T
8"	SF8-T
9"	SF9-T
10"	SF10-T
12"	SF12-T

End Cap not included.



Flex Tee Cap



Flex Pellet Tee Cap

24 Gauge Flex Tee Cap (Type 316L)




	Flex Tee Cap	Flex Pellet Tee Cap
Size	Order #	Order #
3"	SF3-EC	SF3-PEC
4"	SF4-EC	SF4-PEC
5"	SF5-EC	—
5.5"	SF55-EC	—
6"	SF6-EC	—
7"	SF7-EC	—
8"	SF8-EC	—
9"	SF9-EC	—
10"	SF10-EC	—
12"	SF12-EC	—



6" Tee Branch Extension (Adjustable Slip) - Type 316L



Size	Order #
9"	63010616S09
16"	63010616S16



24 Gauge Appliance Connectors (Type 316L)



	Universal Connectors	Insert Appliance Connectors
Size	Order #	Order #
3"	SF3-UC	SF3-IAC
4"	SF4-UC	SF4-IAC
5"	SF5-UC	SF5-IAC
5.5" to 5.5"	SF55-FCON	—
6" to 5.5"	SF55-UC	SF55-IAC
6"	SF6-UC	SF6-IAC
7"	SF7-UC	SF7-IAC
8"	SF8-UC	SF8-IAC
9"	SF9-UC	SF9-IAC
10"	SF10-UC	SF10-IAC
12"	SF12-UC	SF12-IAC

Note:
Universal Connectors are used to connect flex to stove or connect two pieces of flex. Insert Appliance Connectors are used to connect the liner to a fireplace insert when there is a close clearance between the insert and the lintel.






24 Gauge Heavy Locking Insert Appliance Connector (Type 316)



Size	Order #
5.5"	SF55-HLAC
6"	SF6-HLAC

Note: Allows to secure the flexible liner to an insert's flue collar from the inside of the firebox.

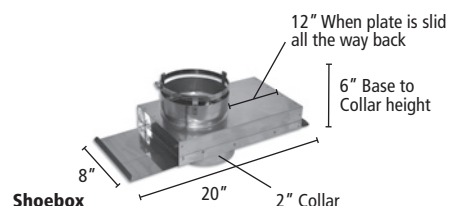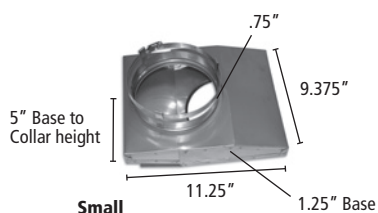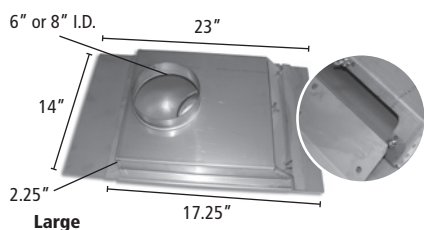

Stainless Steel Insert Offset Adaptor (Type 316L)



	Large	Small	Shoebox
Size	Order #	Order #	Order #
6"	5350906	5350912156	5350916
8"	5350908	—	—

Note: (Large Adaptor). Adjustable a full 6" from front to back; Low Profile (only 3" box height). Removable door for clean out access.



24 Gauge Flex Reducer (Type 316L)



Size	Order #
4" x 3"	SF43-RED
6" x 5"	SF65-RED
6" x 5.5"	SF655-RED
7" x 6"	SF76-RED
8" x 6"	SF86-RED



Not Adjustable



Not Adjustable



24 Gauge 45° and 30° Flex Elbows (Type 316L)



	45° Flex Elbow	30° Flex Elbow
Size	Order #	Order #
4"	SF4-45E	SF4-30E
5"	SF5-45E	SF5-30E
5.5"	SF55-45E	SF55-30E
6"	SF6-45E	SF6-30E
7"	SF7-45E	SF7-30E
8"	SF8-45E	SF8-30E
9"	SF9-45E	SF9-30E
10"	SF10-45E	SF10-30E
12"	SF12-45E	SF12-30E

24 Gauge 90° Flex Elbow (Type 316L)



Size	Order #
4"	SF4-90E
5"	SF5-90E
5.5"	SF55-90E
6"	SF6-90E
7"	SF7-90E
8"	SF8-90E
9"	SF9-90E
10"	SF10-90E
12"	SF12-90E

Stainless Wire Mesh – 25' Rolls



Fits Liner Sizes	Order #
4" -7"	519007
8" -9"	519011
10" -11"	519012

2.5" Cold Weather Foil Tape



Description	Order #
2.5" x 50 Yard	517002

Stainless Steel Wire



Description	Order #
366'	519001

Chamber Safe



Order #
CS05

High performance, refractory parging material. Resists temperatures up to 2900° F. Superior adhesion and better workability. UL listed and tested to the highest, professional standards.



3M Adhesive Glue Spray Can



Description	Order #
16.9 oz	519002



8 Lb. Ceramic Wool Insulation Blanket Foil Faced 25' Rolls



Size	Fits Liner Size	Order #
.25"x18"	3", 4"	517018
.25"x24"	5", 6"	517024
.25"x30"	7", 8"	517030
.25"x48"	9" and above	517048
.5"x18"	3", 4"	518018
.5"x24"	5", 6"	518024
.5"x30"	7", 8"	518030
.5"x48"	9" and above	518048

Note: Use 0.25" blankets with 1.00" clearance to combustible; Use 0.50" blankets with zero clearance to combustible.



Stove Cement



Volume	Order #
3 ounce	SC03
10 ounce	SC10



Insulation Blanket Kits



Size	Order #
3", 4" Liner Size, .25"x18"x25' Insulation Blanket	517018025KT
5", 6" Liner Size, .25"x24"x25' Insulation Blanket	517024025KT
7", 8" Liner Size, .25"x30"x25' Insulation Blanket	517030025KT
3", 4" Liner Size, .5"x18"x25' Insulation Blanket	518018025KT
5", 6" Liner Size, .5"x24"x25' Insulation Blanket	518024025KT
7", 8" Liner Size, .5"x30"x25' Insulation Blanket	518030025KT

Kit includes: Insulated blanket, wire mesh, foil tape and 3M adhesive spray



Insulated and Non-Insulated Flex Pull Cones




	Non-Insulated	Insulated
Size	Order #	Order #
4"	SF4-PC	SF4-PCINS
5"	SF5-PC	SF5-PCINS
6"	SF6-PC	SF6-PCINS
8"	SF8-PC	SF8-PCINS



Hose Clamps



Description	Order #
2.5" to 4.5"	9800064
4.5" to 6.5	9800096
5.75" to 7.75"	9800116
6.5" to 8.5"	9800128
9.75" to 10.75"	9800164
11" to 12"	9800200
1.75" to 16"	9800248

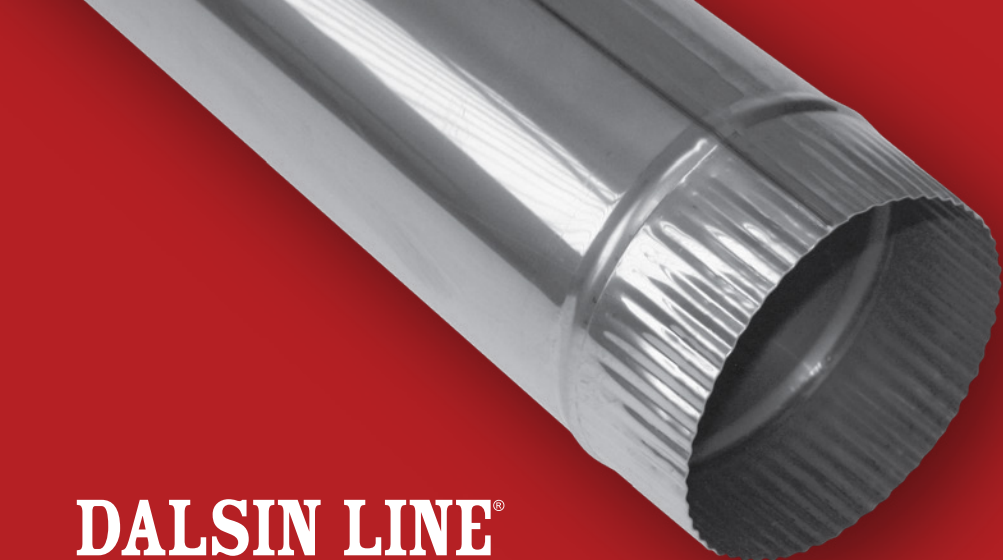

DALSIN LINE®



24 Ga Stainless Rigid Liner & Fittings

"Dalsin Line"® rigid stainless steel liner and fittings are offered in both Type 304 and Type 316L stainless steel. This liner system is intended for relining chimney's servicing wood, pellet, gas, oil, and coal applications and is backed by a limited lifetime warranty.


Key Features

- 1** Continuous Laser Weld for Seamless Pipe and Superior Strength
- 2** 24 gauge stainless steel for durability and performance .024 Thickness
- 3** Type 304 is used for wood, pellet, oil, category 1 gas installations.
- 4** 1.5" overlap at each section
- 5** Type 316 Stainless Steel is used for coal
- 6** Limited Lifetime Warranty




Applications

Wood Insert Masonry Chimney

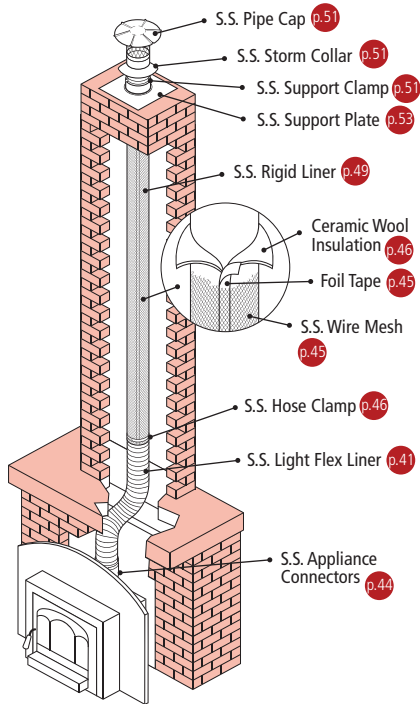

Wood Stove Masonry Chimney

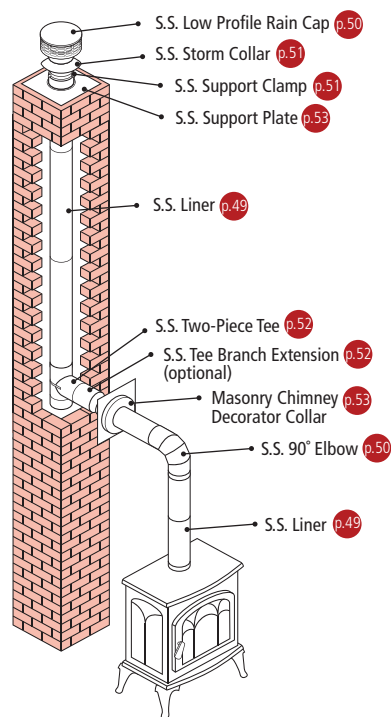

24 Ga SS Rigid Liner

DALSIN LINE®



24 Gauge Stainless Steel Liner – 1, 2, 3 and 4 Foot Lengths



Size	Type 304 Order #	Type 316L Order #
1 Foot Length		
3"	600103	60010316
4"	600104	60010416
5"	600105	60010516
6"	600106	60010616
7"	600107	60010716
8"	600108	60010816
9"	600109	60010916
10"	600110	60011016
12"	600112	60011216
2 Foot Length		
3"	600203	60020316
4"	600204	60020416
5"	600205	60020516
6"	600206	60020616
7"	600207	60020716
8"	600208	60020816
9"	600209	60020916
10"	600210	60021016
12"	600212	60021216
3 Foot Length		
3"	600303	60030316
4"	600304	60030416
5"	600305	60030516
6"	600306	60030616
7"	600307	60030716
8"	600308	60030816
9"	600309	60030916
10"	600310	60031016
12"	600312	60031216
4 Foot Length		
3"	600403	60040316
4"	600404	60040416
5"	600405	60040516
6"	600406	60040616
7"	600407	60040716
8"	600408	60040816
9"	600409	60040916
10"	600410	60041016
12"	600412	60041216

Note: Larger sizes available, please call for pricing



24 Gauge 90° Adjustable Elbow			C	B	4	6
	Type 304	Type 316L				
Size	Order #	Order #				
3"	619003	61900316				
4"	619004	61900416				
5"	619005	61900516				
6"	619006	61900616				
7"	619007	61900716				
8"	619008	61900816				
9"	619009	61900916				
10"	619010	61901016				
12"	619012	61901216				



24 Gauge 45° and 30° Adjustable Angles					C	B	4	6
	Type 304		Type 316L					
Size	45° Order #	30° Order #	45° Order #	30° Order #				
3"	614503	613003	61450316	61300316				
4"	614504	613004	61450416	61300416				
5"	614505	613005	61450516	61300516				
6"	614506	613006	61450616	61300616				
7"	614507	613007	61450716	61300716				
8"	614508	613008	61450816	61300816				
9"	614509	613009	61450916	61300916				
10"	614510	613010	61451016	61301016				
12"	614512	613012	61451216	61301216				

Note: Specify 45° or 30° angle



24 Gauge Stainless Steel Low Profile Rain Cap (Type 316L)		C	B	4	6
Size	Order #				
3"	623003				
4"	623004				
5"	623005				
6"	623006				
7"	623007				
8"	623008				
9"	623009				
10"	623010				
12"	623012				

24 Ga SS Rigid Liner

DALSIN LINE®



24 Gauge Stainless Steel Pipe Cap (Type 304)



Size	Order #
3"	621003
4"	621004
5"	621005
6"	621006
7"	621007
8"	621008
9"	621009
10"	621010
12"	621012

Note: 18 Gauge expanded metal



24 Gauge Stainless Steel Storm Collar



Size	Order #
3"	660003
4"	660004
5"	660005
6"	660006
7"	660007
8"	660008
9"	660009
10"	660010
12"	660012




18 Gauge Support Clamp



Size	Order #
3"	670003
4"	670004
5"	670005
6"	670006
7"	670007
8"	670008
9"	670009
10"	670010
12"	670012

24 Ga SS Rigid Liner

DALSIN LINE®



Note: Removable snout.

End Cap not included.

24 Gauge Stainless Steel Rigid Two-Piece Tee



	Type 304	Type 316L
Size	Order #	Order #
3"	630103	63010316
4"	630104	63010416
5"	630105	63010516
6"	630106	63010616
7"	630107	63010716
8"	630108	63010816
9"	630109	63010916
10"	630110	63011016
12"	630112	63011216



24 Gauge Stainless Steel Tee Cap



	Type 304	Type 316L
Size	Order #	Order #
3"	630203	63020316
4"	630204	63020416
5"	630205	63020516
6"	630206	63020616
7"	630207	63020716
8"	630208	63020816
9"	630209	63020916
10"	630210	63021016
12"	630212	63021216




6" Tee Branch Extension (Adjustable Slip) - Type 316L



Length	Order #
9"	63010616S09
16"	63010616S16

24 Ga SS Rigid Liner

DALSIN LINE®




24 Gauge Stainless Steel Reducer



	Type 304	Type 316L
Size	Order #	Order #
4" x 3"	650403NC	65040316NC
5" x 4"	650504NC	65050416NC
6" x 3"	650603NC	65060316NC
6" x 4"	650604NC	65060416NC
6" x 5"	650605NC	65060516NC
7" x 5"	650705NC	65070516NC
7" x 6"	650706NC	65070616NC
8" x 5"	650805NC	65080516NC
8" x 6"	650806NC	65080616NC
8" x 7"	650807NC	65080716NC
9" x 8"	650908NC	65090816NC
10" x 9"	651009NC	65100916NC

Note: Specify crimped end (SC for short side crimp or LC for long side crimp) or no crimp at all (NC).

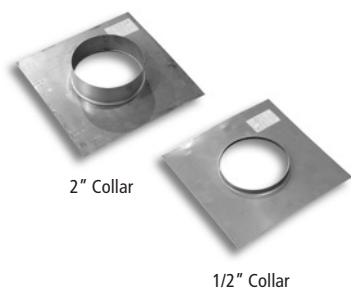


Stainless Steel Support Plate – 18 Gauge



	1/2" Collar	2" Collar
Size	Order #	Order #
9" x 9"	6710**	6810**
9" x 13"	6712**	6812**
13" x 13"	6714**	6814**
13" x 18"	6717**	6817**
18" x 18"	6719**	6819**
24" x 24"	6724**	6824**


**Specify two digit hole size 6" = 06 10" = 10; 3" through 8" holes only on 1/2" collar support plates



24 Ga. Stainless Steel Masonry Chimney Decorator Collar



Size	Order #
3"	694003
4"	694004
6"	694006
8"	694008




Stainless Steel Support Plate Frame			C	B	4	6
Size	Gauge	Order #				
9" x 9"	24	690909				
9" x 13"	24	690913				
13" x 13"	24	691313				
13" x 18"	18	691318				
18" x 18"	18	691818				
24" x 24"	18	692424				

Note: Add to support plate price. Frame will be spot welded to your plate.



Stainless Steel Stove Connector		C	B	4	6
Size	Order #				
3"	530003				
4"	530004				
5"	530005				
6"	530006				
7"	530007				
8"	530008				
9"	530009				
10"	530010				
11"	530011				
12"	530012				



Oval to Round Stainless Steel Adaptor			C	B	4	6
		Round End Down (Round End Crimped)				
Size (Oval to Round)	Order #	Order #				
6" to 6"	540606	5406061				
7" to 6"	540706	5407061				
7" to 7"	540707	5407071				
8" to 6"	540806	5408061				
8" to 7"	540807	5408071				
8" to 8"	540808	5408081				
10" to 8"	541008	5410081				

Note: Specify round end up with oval end crimped or round end down with round end crimped



DALSIN LINE®



26 Ga Stainless Steel Black Single-Wall Stove Pipe

"Dalsin Line"® 26 gauge stove pipe and elbows are intended for wood applications. This liner is an upgrade from standard galvanized venting.


Key Features

- 1 Continuous Laser Weld for Superior Strength
- 2 Black pipe is powder coated instead of (liquid paint) for a beautiful and extremely durable finish.
- 3 Made of Type 304 26 gauge Stainless Steel .018 Thickness
- 4 1.5" overlap at each section
- 5 Limited Lifetime Warranty



Applications

Wood Stove Masonry Chimney

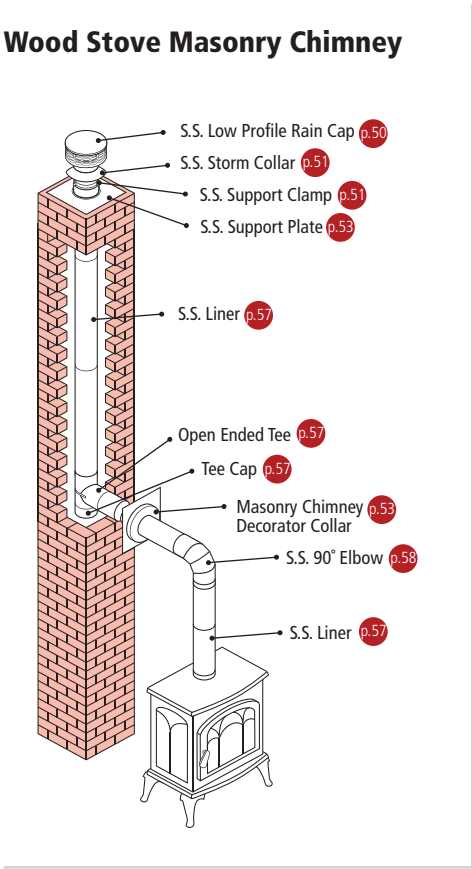

26 Ga SS Black Single-Wall Stove Pipe

DALSIN LINE®



26 Gauge Stainless Steel Seamed Liner



1 Foot		2 Foot
Size	Order #	Order #
3"	92020312B	92020324B
4"	92020412B	92020424B
5"	92020512B	92020524B
6"	92020612B	92020624B
7"	92020712B	92020724B
8"	92020812B	92020824B
3 Foot		4 Foot
3"	92020336B	92020348B
4"	92020436B	92020448B
5"	92020536B	92020548B
6"	92020636B	92020648B
7"	92020736B	92020748B
8"	92020836B	92020848B

Note: Laser welded, prepunched holes

26 Gauge Stainless Steel Slip Joint



Size	Order #
4" x 8.5"	92020485SB
5" x 8.5"	92020585SB
6" x 8.5"	92020685SB
7" x 8.5"	92020785SB
8" x 8.5"	9202085SB

26 Gauge Stainless Steel Open End Tee



Size	Order #
3"	92040300B
4"	92040400B
5"	92040500B
6"	92040600B
7"	92040700B
8"	92040800B

26 Gauge Stainless Steel End Cap



Size	Order #
3"	92110300B
4"	92110400B
5"	92110500B
6"	92110600B
7"	92110700B
8"	92110800B



26 Ga SS Black Single-Wall Stove Pipe

DALSIN LINE®



26 Gauge Stainless Steel 90° Adjustable Elbow



Size Order

3"	92310390B
4"	92310490B
5"	92310590B
6"	92310690B
7"	92310790B
8"	92310890B

26 Gauge Stainless Steel 45° Adjustable Elbow



Size Order

3"	92330345B
4"	92330445B
5"	92330545B
6"	92330645B
7"	92330745B
8"	92330845B




26 Gauge Stainless Steel Reducer



Size Order

4" x 3"	92130403BNC
6" x 5"	92130605BNC
7" x 6"	92130706BNC
8" x 6"	92130806BNC
8" x 7"	92130807BNC

Note: Specify crimped end (SC for short side crimp or LC for long side crimp) or no crimp at all (NC).

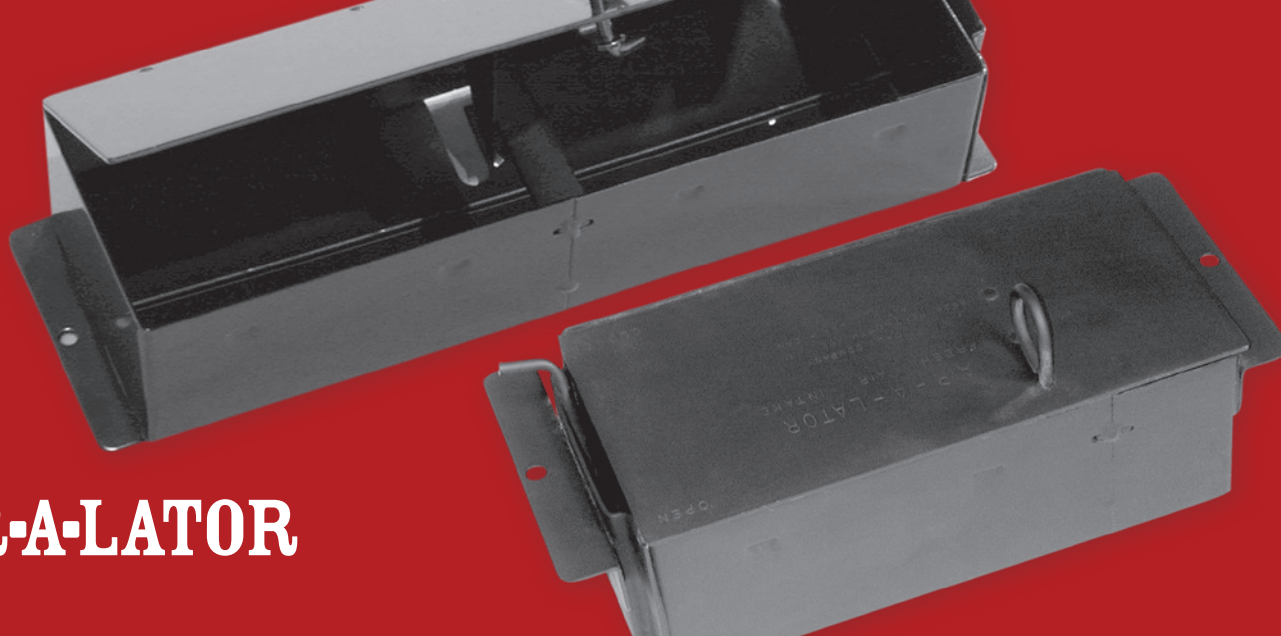

AIR-A-LATOR



Air-A-Lator®


The Air-A-Lator® and the "Mason's Choice" are the number one outside air intake regulators for masonry fireplaces. The fire will burn warmer, cleaner and more safe because regulated outside air is used for combustion. The homeowner can control both the volume of air and direction of air with these unique products.

Key Features



Arrows Indicate Air Flow

Fire burns warmer, cleaner, and safer because regulated outside air is used for combustion. Air follows built-in passage under your fireplace



"Mason's (on side wall) Choice"

For optimum efficiency Air-A-Lator® should be installed in the front row of brick in center of fireplace with opening facing fire or grate.

Exclusive Dual Damper System gives you complete control of combustion air. Other outside air intakes just let you control the volume of air. The Air-A-Lator® Dual Damper System gives you control not only of volume of air, but it also lets you control the direction of air. Both are necessary to produce the proper flames and control the rate of burning.

Helps stop backdraft smoking caused by negative pressure in the home.

Provides safety from dangerous carbon monoxide fumes. The use of an Air-A-Lator® in your fireplace helps prevent great amounts of air from being drawn out of your home. This reduces or eliminates the chance of drawing carbon monoxide fumes from household heating appliances — a growing problem as homes become more air-tight.

Less heat loss for more energy savings. Instead of drawing heated air from inside your home, Air-A-Lator® takes outside air and directs it right where it's needed.

Reduces pollution, ashes and customer complaints. When your fire burns more completely you'll have much less ash and smoke both in the air and in your home.

More heat per pound of fuel. Creosote, smoke, ash and unburned wood are all products of incomplete combustion. Because Air-A-Lator® provides the air needed for complete combustion, you can save dollars on fuel costs.

Meets building requirements. Many states now require a source of outside air. In many cases Air-A-Lator® is the only outside air intake regulator that meets these requirements.



Slip In Air-A-Lator® for New Construction or Retrofit



Type	Dimensions	Order #
NH	13.5" x 4.5" x 2.75"	220414
1B	9" x 4.5" x 2.75"	220409

Note: Type "NH" & "1B" for New Construction or Retrofit; Type "1B" is the size of one brick and has the same advanced qualities as type "NH" 18 gauge galvanized powder coated – black; 10 per case

The "Mason's Choice" 3-Piece Kits



	Rigid	Flex
Inner Dimensions	Order #	Order #
3"	230370	230380
4"	230470	230480

Note: Rigid Kit includes: 12" Tube, Hood, Door; Flex Kit includes 3' SS Flex, Hood, Door

The "Mason's Choice" Stainless Steel Side Wall Outside Air Kit



	Kit	Hood Only	Door Only
Inner Dimensions	Order #	Order #	Order #
3"	230330	230394	230391
4"	230430	230494	230491

Note: Telescopes 14" to 28"; Elbow adjusts 90° to 180°; 26 gauge stainless steel (type 304); Wall vent hood includes screen.

Deluxe Black Stainless Steel Fresh Air Intake Kit

Inner Dimensions	Order #
3"	230318DLX
4"	230418DLX

Kit Includes: Stainless Steel exterior intake plate with hood, black interior insulated decorator plate.

18" Black Stainless Steel or Aluminum Flex

	SS	SS insulated	Alum insulated	Alum without ends
Inner Dimensions	Order #	Order #	Order #	Order #
3"	SF230318B	SF230318INSB	95500304018B	952703018B
4"	SF230418B	SF230418INSB	95500405018B	952704018B

Note: For Insulated Flex, add 1" to get outer dimension

Aluminum Closable Louver and Optional Round Adapter



Dimensions	Order #
8" x 8" Louver	260808
6" Round Adapter	270806

Note: Specify if you want adapter riveted to louver. Includes Screen.

Aluminum Brick Louver – Fixed



Dimensions	Order #
2.25" x 8"	260802

Note: Includes Screen

INSUL-FLUE





Insul-Flue®

Patented USA #4,543,942 and CANADA #1,243,291

Insul Flue® provides security and protection for thru-the-wall stovepipe installations. Insul Flue® actually protects the wall on both sides when the chimney is not adjacent to the house wall. Insul Flue® reduces the minimum 18" clearance specified by NFPA standard to 2". This unique system can be used with both single wall and double wall connector pipe.

Key Features

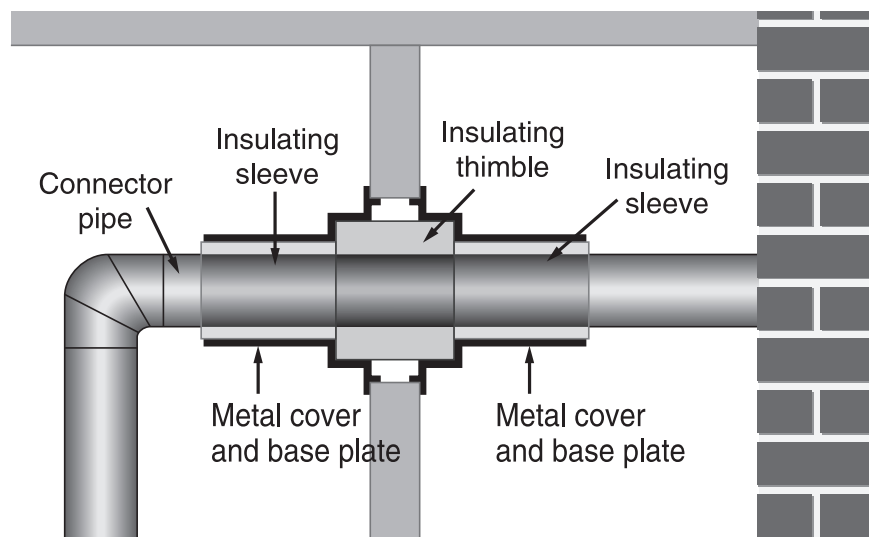


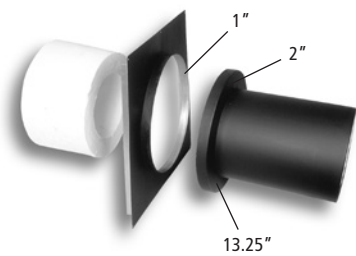

Thimble not included in wall units.
Order separately.

Insul-Flue® Wall Unit and Thimble			C	B	4	6
Item	Pipe Diameter	Order #				
Wall Unit	6"	80010600				
Wall Unit	7"	80010700				
Wall Unit	8"	80010800				
SDV Wall Unit	6"	80010601				
Size (D x L)						
Thimble	6"x8"	80100608				
Thimble	7"x8"	80100708				
Thimble	8"x8"	80100808				
Thimble	6"x12"	80100612				
Thimble	7"x12"	80100712				
Thimble	8"x12"	80100812				

Note: SDV wall unit fits Simpson Dura-Vent™ double wall pipe
Order 2 wall units and one thimble for through inside wall application



See Instructions for Framing Dimensions

Thimble			C	B	4	6
Size	O.D.	I.D.				
6"	11.25"	6.25"				
8"	13.25"	8.25"				



Insul-Plug® Insulated Chimney Plug				C	B	4	6
Size (DxL)	Minimum	Maximum	Order #				
6"	6"	6.375"	810106				
8"	7.75"	8.125"	810108				

Note: Used to seal up an old thimble hole. Insert plug in old thimble hole and tighten expansion bolt on face. Insulation expands causing a tight fit. Constructed of ceramic fiber insulation material.



04

Chimney Caps



Chim-A-Lator®

65

Chimney Caps

68

CHIM-A-LATOR



Chim-A-Lator®



The Chim-A-Lator® Deluxe easily mounts on top of a masonry fireplace flue and is operated by a convenient, adjustable regulator installed on the side wall of the fireplace. It is far more efficient than conventional cast iron dampers and the ideal replacement for old defective dampers. Proven for over 40 years to be the most trouble free top sealing damper.

Key Features


Safest Damper Design on the Market Designed not to close the flue in event of chimney fire. Keeps the fire and smoke in the chimney and out of the house.

Chim-A-Lator® not for use with gas logs or appliances or air cooled factory built chimneys.

- 1 Fully Assembled Out of the Box** Provides for fast easy installation
- 2 Integrated Spark Arrestor** Provides for safe fireplace operation
Keeps Animals Out of the Chimney even when damper is open
- 3 Heavy Duty Frame**
 - Made from 18 ga. stainless steel
 - Provides strength and rigidity
- 4 Threaded Weld Nuts** For easy and secure installation
- 5 Saves Energy** Tight seal on top of chimney, keeps heat in when fireplace is not in use
- 6 Damper opens a full 6.5"** Allows for maximum draft.
6 Setting Regulator Controls the amount of draft to produce more heat when burning.
- 7 Won't Freeze Shut in Cold Climates** Heavy duty stainless steel springs provide 45lbs. of lift when opening damper.
- 8 100% Stainless Steel Construction** No rust or corrosion – Lifetime Warranty

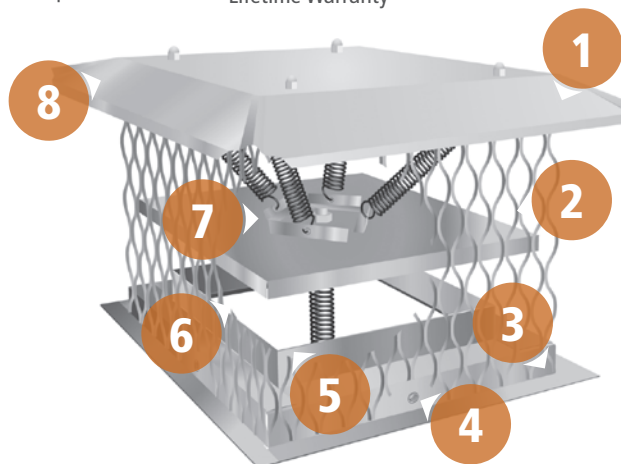

Minimum fireplace depth must be 12.25" (front to back)

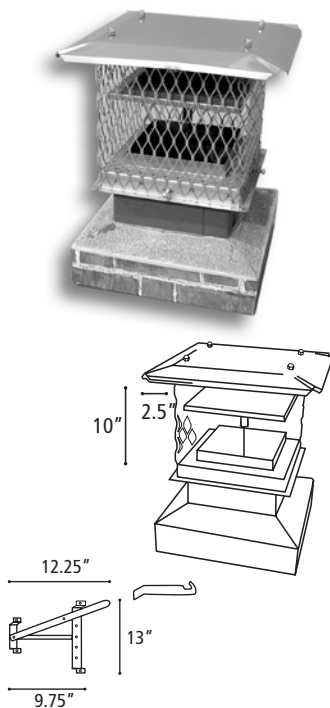

Powder coat
Chim-A-Lator® black (#059998)

CALL FOR PRICING to powder coat
Chim-A-Lator® copper (#059997)

Custom: #059999

Chim-A-Lator® Deluxe Fireplace Damper




Use Outside Dimensions of Flue Tile

3/4" Mesh

5/8" Mesh

Flue Size	Width (from - to)	Length (from - to)	Order #	Order #
8" x 8"	7" - 9.25"	7" - 9.25"	050808	060808
8" x 13"	7" - 9.25"	11" - 13.50"	050813	060813
8" x 18"	7" - 9.25"	16" - 18.25"	050818	060818
8" x 20"	7" - 9.25"	18" - 20.25"	050820	060820
10" x 18"	8" - 10.25"	16" - 18.25"	051018	061018
12" x 12"	10" - 12.25"	10" - 12.25"	051212	061212
13" x 13"	11" - 13.50"	11" - 13.50"	051313	061313
12" x 16"	10" - 12.25"	14" - 16.25"	051216	061216
13" x 18"	11" - 13.50"	16" - 18.25"	051318	061318
13" x 21"	11" - 13.50"	19.50" - 22"	051321	061321
16" x 16"	14" - 16.25"	14" - 16.25"	051616	061616
16" x 20"	14" - 16.25"	18" - 20.25"	051620	061620
18" x 18"	16" - 18.25"	16" - 18.25"	051818	061818
18" x 21"	16" - 18.25"	19.50" - 22"	051821	061821
20" x 20"	18" - 20.25"	18" - 20.25"	052020	062020
20" x 24"	18" - 20.25"	22" - 24.25"	052024	062024
24" x 24"	22" - 24.25"	22" - 24.25"	052424	062424

Note: 5" minimum space between flue tiles required (overhang is 2.5"); Custom size Chim-A-Lator® available.
Call for pricing.

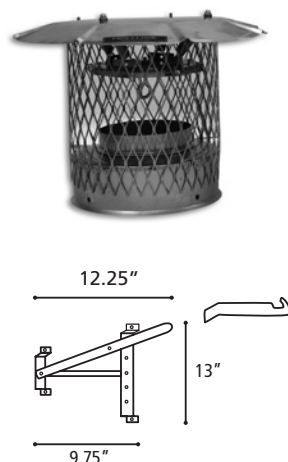

Chim-A-Lator® – Round




Use Outside Dimensions of Flue Tile

3/4" Mesh

5/8" Mesh

Flue Size	Tile O.D. (from - to)	Order #	Order #
8"	8.125" - 9"	050008	060008
10"	10.125" - 11"	050010	060010
12"	12.125" - 13"	050012	060012
14"	14.125" - 15"	050014	060014
16"	16.125" - 17"	050016	060016
18"	18.125" - 19"	050018	060018



Note:
Replacement or longer cable.

Chim-A-Lator® is supplied with 30' of stainless steel cable. (Type 304 Stainless 375# Test.)

7 foot Cable Casing, Hold Down Spring, Turnbuckle, and Clamp

Accessories – Stainless Steel Flue Extension



Flue Size	Order #	Flue Size	Order #
8"x8"	120808	13"x21"	121321
8"x13"	120813	16"x16"	121616
8"x18"	120818	16"x20"	121620
8"x20"	120820	18"x18"	121818
10"x18"	121018	18"x21"	121821
12"x12"	121212	20"x20"	122020
13"x13"	121313	20"x24"	122024
12"x16"	121216	24"x24"	122424
13"x18"	121318	—	—

Note: Installs on chimney where no flue is extending or flue is too short; Tapcon screws are included.

Accessories – Demonstrator



Order #

0508081

Accessories – Stainless Steel Cable Assembly



Length	Order #
30'	130130
40'	130140
50'	130150
60'	130160

Accessories – Stainless Steel Cable Only



Length	Order #
30'	130030
40'	130040
50'	130050
60'	130060

Accessories – Cable Casing



Length	Order #
7'	140007
15'	140015
50'	140050

Note: Protects cable at rub points in chimney; Chim-A-Lator® is supplied with 7 foot piece.

Accessories – Miscellaneous Parts



Description	Order #
Deluxe Handle	152050
Cable Clamp	152011
Turn Buckle	152040

CHIMNEY CAPS



Chimney Caps

The Chim-A-Lator® line of Chimney Caps easily mounts to the top of a masonry fireplace with a simple screwdriver. They are available in both stainless steel and galvanized metal powder coated black with over 50 standard sizes to save you both time and money.



Key Features

- 1 **24 Gauge Material Thickness** for superior strength
- 2 **18 Gauge screen for added durability**
- 3 **Weld nuts provide a secure attachment to chimney**
- 4 **Lifetime Warranty** on Stainless Steel Caps



Chimney Caps

CHIMNEY CAPS



Charge for black powder coating stainless steel caps #499998

Charge for copper powder coating stainless steel caps #499997
- CALL FOR PRICING

Stainless Steel Stackable Chimney Cap



Use Outside Dimensions

Flue Size	Width (from - to)	Length (from - to)	Order #
8"x8"	7" - 9.25"	7" - 9.25"	460808
8"x13"	7" - 9.25"	11" - 13.5"	460813
12"x12"	10" - 12.25"	10" - 12.25"	461212
13"x13"	11" - 13.5"	11" - 13.5"	461313

Note: 7" minimum required between flue tiles (overhang is 3.5")
Stackable chimney caps must be ordered in six packs; Meets 5/8" California requirements.

Stainless Steel Chimney Cap – Square



Use Outside Dimensions

3/4" Mesh


5/8" Mesh

Flue Size	Width (from - to)	Length (from - to)	Order #	Order #
5"x8"	4" - 6.25"	7" - 9.25"	430508	—
8"x8"	7" - 9.25"	7" - 9.25"	430808	400808
8"x13"	7" - 9.25"	11" - 13.50"	430813	400813
8"x18"	7" - 9.25"	16" - 18.25"	430818	400818
12"x12"	10" - 12.25"	10" - 12.25"	431212	401212
13"x13"	11" - 13.50"	11" - 13.50"	431313	401313
12"x16"	10" - 12.25"	14" - 16.25"	431216	401216
13"x18"	11" - 13.50"	16" - 18.25"	431318	401318
16"x16"	14" - 16.25"	14" - 16.25"	431616	401616
16"x20"	14" - 16.25"	18" - 20.25"	431620	401620
18"x18"	16" - 18.25"	16" - 18.25"	431818	401818
20"x20"	18" - 20.25"	18" - 20.25"	432020	402020
20"x24"	18" - 20.25"	22" - 24.25"	432024	402024
24"x24"	22" - 24.25"	22" - 24.25"	432424	402424

Note: 7" minimum required between flue tiles (overhang is 3.5")

Chimney Caps

CHIMNEY CAPS




Charge for black powder coating stainless steel caps #499998

Charge for copper powder coating stainless steel caps #499997
- CALL FOR PRICING

Stainless Steel Chimney Cap – Round



Use Outside Dimensions			
		3/4" Mesh	5/8" Mesh
Flue Size	Tile O.D. (from - to)	Order #	Order #
6"	6.125" - 7"	440006	410006
7"	7.125" - 8"	440007	410007
8"	8.125" - 9"	440008	410008
9"	9.125" - 10"	440009	410009
10"	10.125" - 11"	440010	410010
11"	11.125" - 12"	440011	410011
12"	12.125" - 13"	440012	410012
13"	13.125" - 14"	440013	410013
14"	14.125" - 15"	440014	410014
15"	15.125" - 16"	440015	410015
16"	16.125" - 17"	440016	410016
17"	17.125" - 18"	440017	410017
18"	18.125" - 19"	440018	410018



1.5"

Charge for black powder coating stainless steel caps #499998

Charge for copper powder coating stainless steel caps #499997
- CALL FOR PRICING

Stainless Steel California Chimney Cap



Use Outside Dimensions			
Flue Size	Width (from - to)	Length (from - to)	Order #
8" x 8"	7" - 9.25"	7" - 9.25"	420808
8" x 13"	7" - 9.25"	11" - 13.5"	420813
8" x 18"	7" - 9.25"	16" - 18.25"	420818
8" x 20"	7" - 9.25"	18" - 20.25"	420820
10" x 18"	8" - 10.25"	16" - 18.25"	421018
13" x 13"	11" - 13.5"	11" - 13.5"	421313
13" x 18"	11" - 13.5"	16" - 18.25"	421318
13" x 21"	11" - 13.5"	19.5" - 22"	421321
16" x 20"	14" - 16.25"	18" - 20.25"	421620
17" x 21"	15" - 17.25"	19.5" - 22"	421721
18" x 18"	16" - 18.25"	16" - 18.25"	421818
20" x 24"	18" - 20.25"	22" - 24.25"	422024
24" x 24"	22" - 24.25"	22" - 24.25"	422424

Note: Angles are welded on bottom for oval flues.

Chimney Caps

CHIMNEY CAPS




Charge for black powder coating stainless steel caps #499998

Charge for copper powder coating stainless steel caps #499997
- CALL FOR PRICING

Stainless Steel Spark Arrestor



	Use Outside Dimensions		3/4" Mesh	5/8" Mesh
Flue Size	Width (from - to)	Length (from - to)	Order #	Order #
8" x 8"	7" - 9.25"	7" - 9.25"	480808	450808
8" x 13"	7" - 9.25"	11" - 13.50"	480813	450813
8" x 18"	7" - 9.25"	16" - 18.25"	480818	450818
12" x 12"	10" - 12.25"	10" - 12.25"	481212	451212
13" x 13"	11" - 13.50"	11" - 13.50"	481313	451313
12" x 16"	10" - 12.25"	14" - 16.25"	481216	451216
13" x 18"	11" - 13.50"	16" - 18.25"	481318	451318
16" x 16"	14" - 16.25"	14" - 16.25"	481616	451616
16" x 20"	14" - 16.25"	18" - 20.25"	481620	451620
18" x 18"	16" - 18.25"	16" - 18.25"	481818	451818
20" x 20"	18" - 20.25"	18" - 20.25"	482020	452020
20" x 24"	18" - 20.25"	22" - 24.25"	482024	452024
24" x 24"	22" - 24.25"	22" - 24.25"	482424	452424



Leg Kits




Order #

390004

Note: Used to attach cap when a flue tile is not exposed.

Chimney Caps

CHIMNEY CAPS

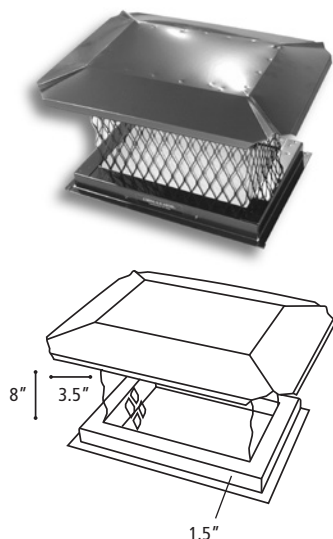


Black Galvanized Steel Chimney Cap – Square



	Use Outside Dimensions		3/4" Mesh	5/8" Mesh
Flue Size	Width (from - to)	Length (from - to)	Order #	Order #
8" x 8"	7" - 9.25"	7" - 9.25"	330808	300808
8" x 13"	7" - 9.25"	11" - 13.50"	330813	300813
8" x 18"	7" - 9.25"	16" - 18.25"	330818	300818
12" x 12"	10" - 12.25"	10" - 12.25"	331212	301212
13" x 13"	11" - 13.50"	11" - 13.50"	331313	301313
12" x 16"	10" - 12.25"	14" - 16.25"	331216	301216
13" x 18"	11" - 13.50"	16" - 18.25"	331318	301318
16" x 16"	14" - 16.25"	14" - 16.25"	331616	301616
16" x 20"	14" - 16.25"	18" - 20.25"	331620	301620
18" x 18"	16" - 18.25"	16" - 18.25"	331818	301818
20" x 20"	18" - 20.25"	18" - 20.25"	332020	302020
20" x 24"	18" - 20.25"	22" - 24.25"	332024	302024
24" x 24"	22" - 24.25"	22" - 24.25"	332424	302424

Note: 7" minimum required between flue tiles (overhang is 3.5")



Black Galvanized Steel California Chimney Cap




	Use Outside Dimensions		
Flue Size	Width (from - to)	Length (from - to)	Order #
8" x 8"	7" - 9.25"	7" - 9.25"	320808
8" x 13"	7" - 9.25"	11" - 13.5"	320813
8" x 18"	7" - 9.25"	16" - 18.25"	320818
8" x 20"	7" - 9.25"	18" - 20.25"	320820
10" x 18"	8" - 10.25"	16" - 18.25"	321018
13" x 13"	11" - 13.5"	11" - 13.5"	321313
13" x 18"	11" - 13.5"	16" - 18.25"	321318
13" x 21"	11" - 13.5"	19.5" - 22"	321321
16" x 20"	14" - 16.25"	18" - 20.25"	321620
17" x 21"	15" - 17.25"	19.5" - 22"	321721
18" x 18"	16" - 18.25"	16" - 18.25"	321818
20" x 24"	18" - 20.25"	22" - 24.25"	322024
24" x 24"	22" - 24.25"	22" - 24.25"	322424

Note: Available only in 5/8" mesh; Angles are welded on bottom for oval flues.

Chimney Caps


CHIMNEY CAPS

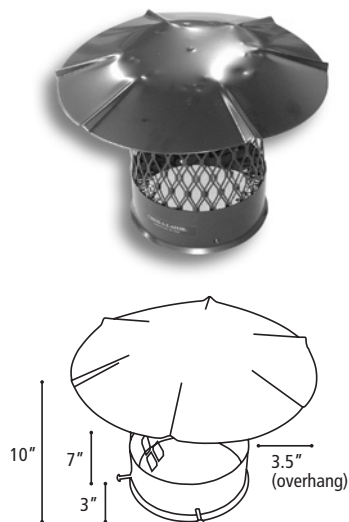

Black Galvanized Steel Chimney Cap – Round



	Use Outside Dimensions	3/4" Mesh	5/8" Mesh
Flue Size	Tile O.D. (from - to)	Order #	Order #
6"	6.125" - 7"	340006	310006
7"	7.125" - 8"	340007	310007
8"	8.125" - 9"	340008	310008
9"	9.125" - 10"	340009	310009
10"	10.125" - 11"	340010	310010
11"	11.125" - 12"	340011	310011
12"	12.125" - 13"	340012	310012
13"	13.125" - 14"	340013	310013
14"	14.125" - 15"	340014	310014
15"	15.125" - 16"	340015	310015
16"	16.125" - 17"	340016	310016
17"	17.125" - 18"	340017	310017
18"	18.125" - 19"	340018	310018



Black Galvanized Steel Spark Arrestor



	Use Outside Dimensions	3/4" Mesh	5/8" Mesh
Flue Size	Width (from - to)	Length (from - to)	Order #
8"x8"	7" - 9.25"	7" - 9.25"	380808
8"x13"	7" - 9.25"	11" - 13.50"	380813
8"x18"	7" - 9.25"	16" - 18.25"	380818
12"x12"	10" - 12.25"	10" - 12.25"	381212
13"x13"	11" - 13.50"	11" - 13.50"	381313
12"x16"	10" - 12.25"	14" - 16.25"	381216
13"x18"	11" - 13.50"	16" - 18.25"	381318
16"x16"	14" - 16.25"	14" - 16.25"	381616
16"x20"	14" - 16.25"	18" - 20.25"	381620
18"x18"	16" - 18.25"	16" - 18.25"	381818
20"x20"	18" - 20.25"	18" - 20.25"	382020
20"x24"	18" - 20.25"	22" - 24.25"	382024
24"x24"	22" - 24.25"	22" - 24.25"	382424



Crown Safe



Order

CRS01

High performance, refractory parging material. Resists temperatures up to 2900° F. Superior adhesion and better workability. UL listed and tested to the highest, professional standards.



Toll-free | (800) 729-9505
Phone | (651) 460-1080
Email | sales@dalsinmfg.com
Fax | (651) 460-6080